




Bearing No. NU308-E-TVP2

E	80 mm
F	52 mm
d	40 mm
D	90 mm
B	23 mm
m	0,659 kg / Weight
s	1,3 mm / Axial displacement facility from central position
Size (mm)	40x90x23
Width (mm)	23
n_B	7300 1/min
n_G	9500 1/min / Limiting speed
D_1	75,9 mm
C_r	96000 N / Dynamic load rating (radial)
C_{Or}	79000 N / Static load rating (radial)
Bearing number	NU308-E-TVP2
C_{ur}	10200 N / Fatigue limit load, radial
r_{min}	1,5 mm
$r_{1 min}$	1,5 mm
$r_{a max}$	1,5 mm
$d_{b min}$	55 mm
$d_{a min}$	49 mm
$d_{a max}$	51 mm
$D_{a max}$	81 mm
$r_{a1 max}$	1,5 mm

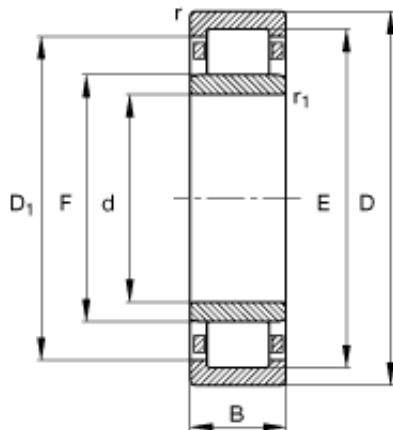

Bore Diameter (mm)	40
Outer Diameter (mm)	90