


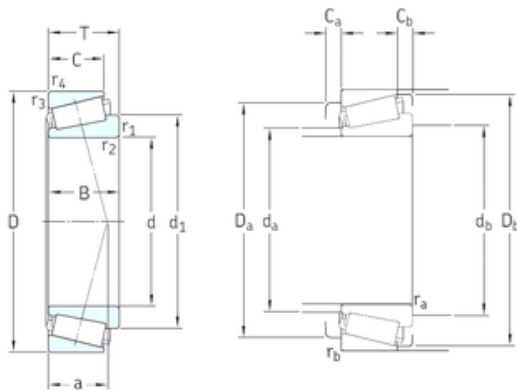

**Bearing No. 32252J2/HA1**

|                        |             |
|------------------------|-------------|
| D                      | 480 mm      |
| d                      | 260 mm      |
| T                      | 137 mm      |
| B                      | 130 mm      |
| C                      | 106 mm      |
| a                      | 112 mm      |
| d1                     | 366 mm      |
| Weight                 | 105 Kg      |
| db min                 | 272 mm      |
| Da min                 | 401 mm      |
| da max                 | 304 mm      |
| Ca min.                | 17 mm       |
| Cb min.                | 31 mm       |
| Db min.                | 454 mm      |
| Da max.                | 470 mm      |
| r1 min.                | 6 mm        |
| r4 min.                | 5 mm        |
| r3 min.                | 5 mm        |
| r2 min.                | 6 mm        |
| rb max.                | 4 mm        |
| ra max.                | 5 mm        |
| Size (mm)              | 260x480x137 |
| Width (mm)             | 137         |
| Limiting speed         | 1200 r/min  |
| Bearing number         | 32252J2/HA1 |
| Reference speed        | 900 r/min   |
| Bore Diameter (mm)     | 260         |
| Outer Diameter (mm)    | 480         |
| Calculation factor (e) | 0,43        |
| Calculation factor (Y) | 1,4         |

|                               |         |
|-------------------------------|---------|
| Fatigue load limit (Pu)       | 300     |
| Basic dynamic load rating (C) | 2200 kN |
| Basic static load rating (C0) | 3650 kN |