


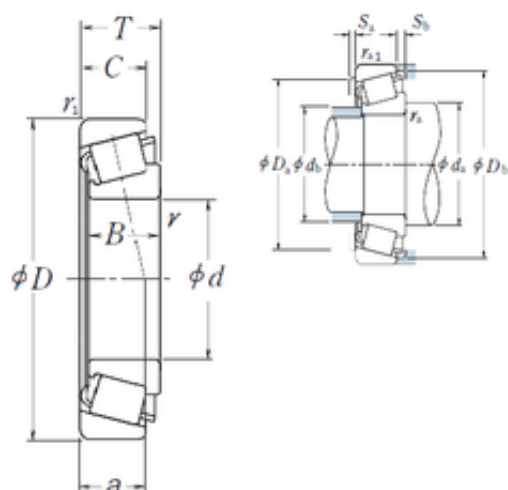

Bearing No. 32260

D	540 mm
d	300 mm
T	149 mm
B	140 mm
C	115 mm
a	131,6 mm
e	0.46
Cr	226000
Y0	0.72
db	352
da	333
Y1	1.3
B_	140
Sb	34
C0	3700
Sa	15
D_	540
Z_	19
C_	115
C0r	380000
DA_	57.201
Iso	-
DE_	478.495
D_b	514
DI_	368.631
SBRG	22
SDM_	423.563
D_a2	458
KBRG	3111
yobi	32260

D_a1	518
mass	132
TC-RA	868.297
r min.	6 mm
Weight	132 Kg
TC-DA1	60.602
TC-DA2	53.799
TC-SLR	98
Da min	458 mm
LangID	1
ALPHA_	17
Db min.	514 mm
Oil rpm	800
db max.	352 mm
Da max.	518 mm
ra max.	5 mm
hidYobi	32260
da min.	333 mm
T-ALP21	34
rb max.	4 mm
T-ALP22	0
T-ALP23	0
GRS rpm	600
inner r	6
outer r	5
r1 min.	5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	5
outer rb	4
TC-BET22	0

Size (mm)	300x540x149
Width (mm)	149
Prod_Type3	TRBSR_MD_A
Bearing number	32260
Bore Diameter (mm)	300
Outer Diameter (mm)	540
Calculation factor (e)	0,46
Calculation factor (Y0)	0,72
(Oil) Lubrication Speed	800 r/min
(Grease) Lubrication Speed	600 r/min
Basic dynamic load rating (C)	2220 kN
Basic static load rating (C0)	3700 kN