


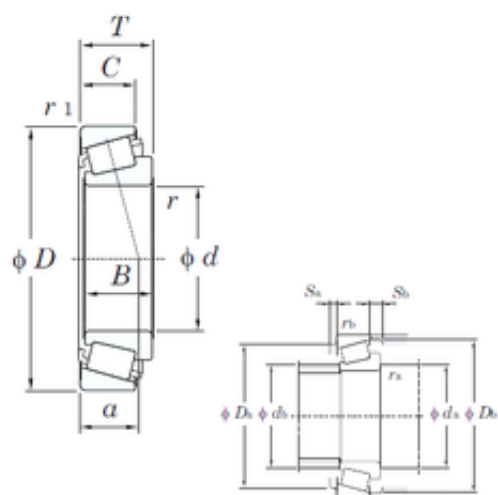

Bearing No. 32306JR

D	72 mm
d	30 mm
T	28,75 mm
B	27 mm
C	23 mm
a	18,9 mm
e	0.31
Cr	103
Cu	13.8
Y0	1.05
Y1	1.90
C0r	91.6
Bore	1.181 Inch 30 Millimeter
Noun	Bearing
a(mm)	18.9
Da min	59 mm
da max	39 mm
Weight	0,588 Kg
r min.	1,5 mm
r(min)	1.5
UNSPSC	31171516
Db(min)	66
db(max)	39
Da(max)	63.5
Da(min)	59
r1(min)	1.5
Sa(min)	3
Sb(min)	5.5
ra(max)	1.5

rb(max)	1.5
da(min)	38.5
ra max.	1,5 mm
Db min.	66 mm
Da max.	63,5 mm
da min.	38,5 mm
r2 min.	1,5 mm
rb max.	1,5 mm
Oil lub.	7900
Category	Tapered Roller Bearings Assembly
Size (mm)	30x72x28.75
Component	Assembly
Inventory	2.0
Width (mm)	28,75
Grease lub.	5900
Bearing No.	32306JR
Basic Number	32306
Weight / LBS	1.296
Inch - Metric	Metric
Product Group	B04334
Other Features	High Load Capacity
Keyword String	Tapered
Assembly Width	1.132 Inch 28.75 Millimeter
Bearing number	32306JR
Precision Class	Standard
(Refer.)Mass(kg)	0.588
Manufacturer URL	http://www.koyousa.com
Long Description	Assembly; Standard Precision; 30MM Bore; 72MM Outside Diameter; 28.75MM Assembly Width; Single

	Row of Rollers
Outside Diameter	2.835 Inch 72 Millimeter
Weight / Kilogram	0.59
Manufacturer Name	KOYO
Bore Diameter (mm)	30
Outer Diameter (mm)	72
Minimum Buy Quantity	N/A
Number of Tapered Rows	Single Row
Harmonized Tariff Code	8482.20.00.00
Calculation factor (e)	0,31
Flange Outside Diameter	0 Inch 0 Millimeter
(Oil) Lubrication Speed	7900 r/min
Calculation factor (Y0)	1,05
Manufacturer Item Number	32306JR
(Grease) Lubrication Speed	5900 r/min
Basic static load rating (C0)	91,6 kN
Basic dynamic load rating (C)	82,2 kN