


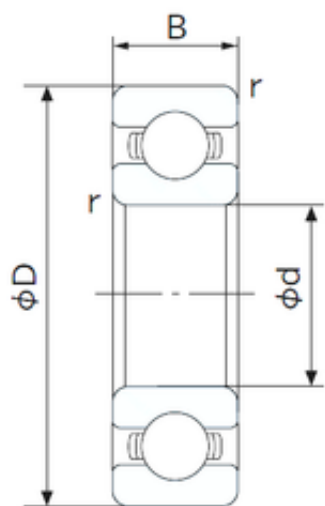

Bearing No. 16012

C	11 mm
d	60 mm
D	95 mm
B	11 mm
Noun	Bearing
Bore	2.362 Inch 60 Millimeter
Width	11 mm
Weight	0.280 Kg
UNSPSC	31171504
r min.	0.6 mm
Da max.	88 mm
ra max.	0.6 mm
da min.	67 mm
Category	Single Row Ball Bearing
Da (max)	88 mm
da (min)	67 mm
ra (max)	0.6 mm
Bore Size	60 mm
Inventory	0.0
Bore Type	Cylindrical Bore
Factor fo	16.5
Enclosure	Open
Snap Ring	No
Size (mm)	60x95x11
Width (mm)	11
Weight / LBS	0.62
Inch - Metric	Metric
Product Group	B00308
Configuration	Single Row

Keyword String	Ball
Bearing number	16012
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Long Description	60MM Bore; 95MM Outside Diameter; 11MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outside Diameter	3.74 Inch 95 Millimeter
Radial Clearance	0.008 to 0.028 mm
Outer Race Width	0.433 Inch 11 Millimeter
Manufacturer URL	http://www.nachi.com
Weight / Kilogram	0.281
Manufacturer Name	NACHI
Static Load Rating	14,300 N
Internal Clearance	C0-Medium
Bore Diameter (mm)	60
Dynamic Load Rating	16,200 N
Outer Diameter (mm)	95
Minimum Buy Quantity	N/A
Limiting Speed - Oil	8,500 rpm
Fillet Radius/Chamfer	0.6 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	7,100 rpm
Manufacturer Item Number	16012 BNLS
Internal Special Features	No
(Grease) Lubrication Speed	7000 r/min
Basic static load rating	14,3 kN

(C0)	
Basic dynamic load rating (C)	16,2 kN
Maximum Capacity / Filling Slot	No