


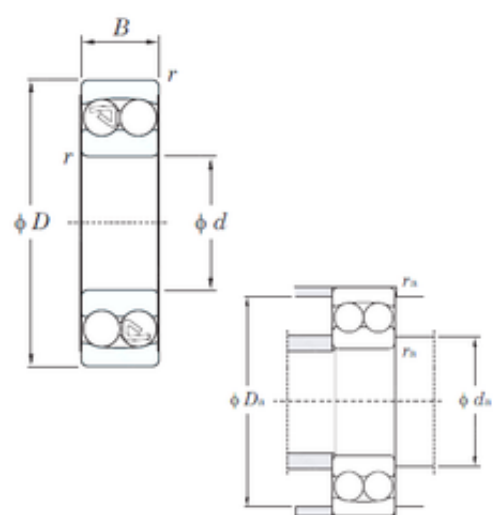

Bearing No. 1213

D	120 mm
d	65 mm
B	23 mm
C	23 mm
e	0.17
Y1	3.67
Y0	3.84
Y2	5.68
Cr	31.0
Cu	0.79
C0r	12.4
Bore	2.559 Inch 65 Millimeter
Noun	Bearing
r(min)	1.5
UNSPSC	31171532
r min.	1.5 mm
Weight	1.15 Kg
ra(max)	1.5
Da(max)	112
da(min)	73
ra max.	1.5 mm
da min.	73 mm
Da max.	112 mm
Oil lub.	5800
Category	Self Aligning Ball Bearings
Inventory	0.0
Enclosure	Open
Size (mm)	65x120x23
Width (mm)	23

Grease lub.	4800
Bearing No.	1213
Weight / LBS	2.53531
Product Group	B00152
Cage Material	Steel
Inch - Metric	Metric
Other Features	Allowable Misalignment 2.5 Deg
Keyword String	Self Aligning
Bearing number	1213
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Mounting Method	Shaft
(Refer.)Mass(kg)	1.15
Manufacturer URL	http://www.koyousa.com
Outer Race Width	0.906 Inch 23 Millimeter
Outside Diameter	4.724 Inch 120 Millimeter
Inner Race Width	0.906 Inch 23 Millimeter
Long Description	65MM Bore; Shaft Mount; 120MM Outside Diameter; 23MM Inner Race Width; 23MM Outer Race Width; Open; Steel Cage; Double Row of Balls; ABEC 1 ISO P0; C0-Medium
Weight / Kilogram	1.243
Manufacturer Name	KOYO
Bore Diameter (mm)	65
Internal Clearance	C0-Medium
Outer Diameter (mm)	120
Minimum Buy Quantity	N/A

Harmonized Tariff Code	8482.10.50.68
Calculation factor (e)	0.17
Calculation factor (Y0)	3.84
(Oil) Lubrication Speed	5800 r/min
Calculation factor (Y1)	3.67
Number of Rows of Balls	Double Row
(Grease) Lubrication Speed	4800 r/min
Basic static load rating (C0)	12.5 kN
Basic dynamic load rating (C)	31.0 kN