


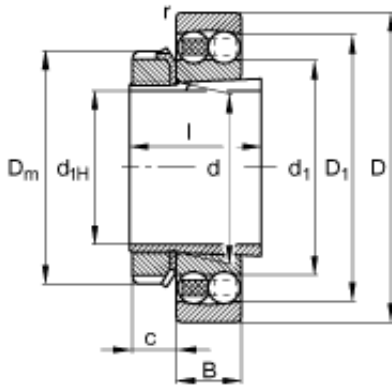

Bearing No. 1213-K-TVH-C3 + H213

	H213 / Adapter sleeve
d	65 mm
m	1,13 kg / Weight
e	0,18
D	120 mm
B	23 mm
l	40 mm
c	14 mm
Size (mm)	60x120x23
Width (mm)	23
m ₁	0,4 kg / Weight, adapter sleeve
Y ₁	3,57
d ₁	85,2 mm
Y ₂	5,52
D _m	85 mm
C _r	31000 N / Dynamic load rating (radial)
D ₁	103,2 mm
Y ₀	3,74
n _G	6300 1/min / Limiting speed
n _B	7900 1/min / Reference speed
C _{0r}	12400 N / Static load rating (radial)
Bearing number	1213-K-TVH-C3 + H213
C _{ur}	770 N / Fatigue limit load, radial
d _{1H}	60 mm
r _{a max}	1,5 mm

$d_{b \text{ min}}$	70 mm
$D_{a \text{ max}}$	111 mm
$B_{a \text{ min}}$	5 mm
$d_{a \text{ max}}$	74 mm
Bore Diameter (mm)	60
Outer Diameter (mm)	120