


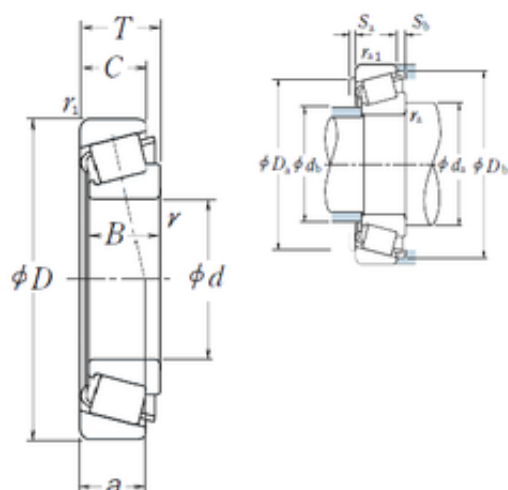

Bearing No. 32312C

D	130 mm
d	60 mm
T	48,5 mm
B	46 mm
C	35 mm
a	39,9 mm
e	0.58
Cr	20000
Y0	0.57
db	74
da	81
Y1	1
B_	46
Sb	13.5
C0	249
Sa	4
D_	130
Z_	14
C_	35
C0r	25400
DA_	16.282
Iso	-
DE_	110.634
D_b	125
DI_	80.372
SBRG	23
SDM_	95.503
D_a2	102
KBRG	3111
yobi	32312C

D_a1	116
mass	2.86
TC-RA	171.966
r min.	3 mm
Weight	2,86 Kg
TC-DA1	17.997
TC-DA2	14.566
TC-SLR	33
Da min	102 mm
LangID	1
ALPHA_	21
Db min.	125 mm
Oil rpm	3800
db max.	74 mm
Da max.	116 mm
ra max.	2,5 mm
hidYobi	32312C
da min.	81 mm
T-ALP21	42
rb max.	2 mm
T-ALP22	0
T-ALP23	0
GRS rpm	2800
inner r	3
outer r	2.5
r1 min.	2,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	6
inner ra	2.5
outer rb	2
TC-BET22	0

Size (mm)	60x130x48.5
Width (mm)	48,5
Prod_Type3	TRBSR_MD_A
Bearing number	32312C
Bore Diameter (mm)	60
Outer Diameter (mm)	130
Calculation factor (e)	0,58
Calculation factor (Y0)	0,57
(Oil) Lubrication Speed	3800 r/min
(Grease) Lubrication Speed	2800 r/min
Basic dynamic load rating (C)	196 kN
Basic static load rating (C0)	249 kN