


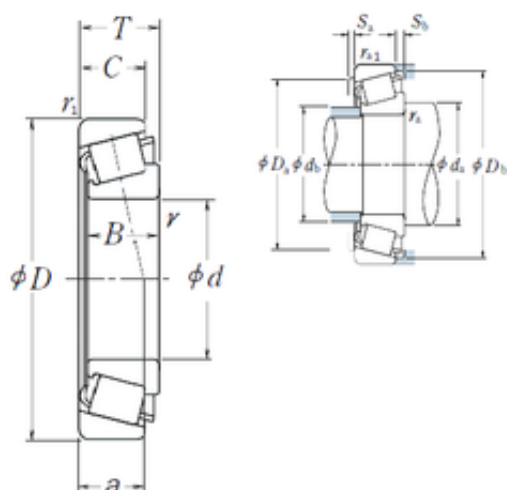

Bearing No. 32315CA

D	160 mm
d	75 mm
T	58 mm
B	55 mm
C	43 mm
a	47,7 mm
e	0.58
Cr	32000
Y0	0.57
db	90
da	96
Y1	1
B_	55
Sb	15
C0	420
Sa	4
D_	160
Z_	16
C_	43
C0r	43000
DA_	19.918
Iso	-
DE_	136.286
D_b	153
DI_	98.358
SBRG	23
SDM_	117.322
D_a2	124
KBRG	3111
yobi	32315CA

D_a1	148
mass	5.3
TC-RA	210.181
r min.	3 mm
Weight	5,3 Kg
TC-DA1	21.997
TC-DA2	17.838
TC-SLR	40
Da min	124 mm
LangID	1
ALPHA_	21
Db min.	153 mm
Oil rpm	3200
db max.	90 mm
Da max.	148 mm
ra max.	2,5 mm
hidYobi	32315CA
da min.	96 mm
T-ALP21	42
rb max.	2 mm
T-ALP22	0
T-ALP23	0
GRS rpm	2200
inner r	3
outer r	2.5
r1 min.	2,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	6
inner ra	2.5
outer rb	2
TC-BET22	0

Size (mm)	75x160x58
Width (mm)	58
Prod_Type3	TRBSR_MD_A
Bearing number	32315CA
Bore Diameter (mm)	75
Outer Diameter (mm)	160
Calculation factor (e)	0,58
Calculation factor (Y0)	0,57
(Oil) Lubrication Speed	3200 r/min
(Grease) Lubrication Speed	2200 r/min
Basic dynamic load rating (C)	310 kN
Basic static load rating (C0)	420 kN