


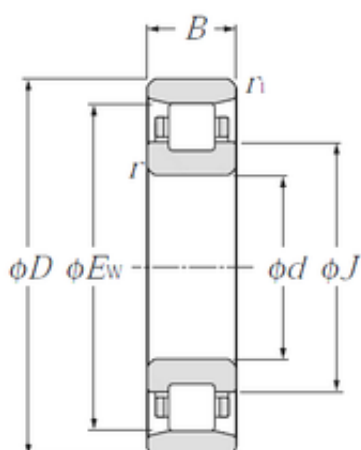

Bearing No. N405

F	38.8 mm
D	80 mm
J	43,6 mm
B	21 mm
C	21 mm
E	62.8 mm
d	25 mm
Ew	62,8 mm
d1	43.6 mm
Db min	63.6 mm
Dc max	60.6 mm
r min.	1,5 mm
Da max	72 mm
ra max	1.5 mm
Weight	0,536 Kg
da min	33 mm
rs min	1.5 mm
r1s min	1.5 mm
r1a max	1.5 mm
r1 min.	1,5 mm
Size (mm)	25x62.8x21
Nlim (oil)	10,000 rpm
Width (mm)	21
Nlim (grease)	8,500 rpm
Bearing number	N405
Dynamic load, C	46.5 kN
Static load, C0	40 kN
Bore Diameter (mm)	25
Outer Diameter (mm)	62,8
Fatigue limit load, Cu	4.9 kN

Mass (without HJ ring)	0.54 kg
Radial clearance class	CN
(Grease) Lubrication Speed	8 500 r/min
Basic dynamic load rating (C)	46,5 kN
Basic static load rating (C0)	40 kN
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C