


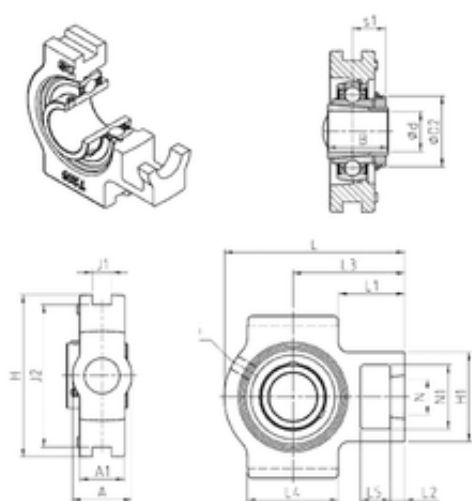

Bearing No. UKT316H

C	122.85 kN
N	53 mm
d	70 mm
G	M10x1
A	102 mm
B	78 mm
H	230 mm
L	282 mm
N2	98 mm
H2	150 mm
d1	105 mm
B1	78 mm
A5	44.5 mm
A2	60 mm
J2	204 mm
J1	30 mm
L1	94 mm
N1	98 mm
C0	86.5 kN
H1	150 mm
D2	105 mm
A1	60 mm
s1	44,5 mm
L3	174 mm
L2	30 mm
L5	42 mm
L4	160 mm
T max.	100 °C
Weight	16,2 Kg
T min.	-20 °C

Thread (G)	M10x1
Bearing number	UKT316H
Bore Diameter (mm)	70
Designation of housing	T316-
Designation of bearing	UK316G2H
Adapter sleeve reference	H2316
Basic dynamic load rating (C)	122,85 kN