


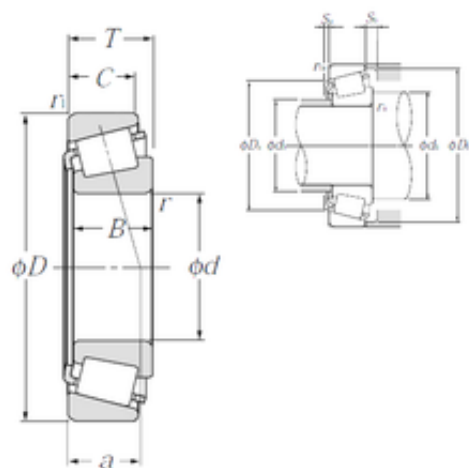

Bearing No. 32322U

a	57,5 mm
B	80 mm
C	65 mm
e	0.35
d	110 mm
D	240 mm
T	84,5 mm
Sa	6 mm
Sb	19,5 mm
Y2	1.74
Y0	0.96
Mass	18 kg
Weight	18 Kg
r min.	4 mm
rs min	3 mm
db min	135 mm
Da min	198 mm
Da max	226 mm
da max	128 mm
Db min	222 mm
ra max	3 mm
r1s min	2.5 mm
Db min.	222 mm
r1a max	2.5 mm
ra max.	3 mm
Da max.	226 mm
da min.	128 mm
r1 min.	3 mm
db max.	135 mm
ra1 max.	2,5 mm

Category	Bearings
Size (mm)	110x240x84.5
Inventory	0.0
Nlim (oil)	2,200 rpm
Width (mm)	84,5
Product Group	B04334
Nlim (grease)	1,600 rpm
Bearing number	32322U
Static load, C0	970 kN
Dynamic load, C	705 kN
Weight / Kilogram	18
ISO 355 reference	T2GD110
Manufacturer Name	NTN
Bore Diameter (mm)	110
Outer Diameter (mm)	240
Minimum Buy Quantity	N/A
Calculation factor (e)	0,35
(Oil) Lubrication Speed	2 200 r/min
Calculation factor (Y0)	0,96
(Grease) Lubrication Speed	1 600 r/min
Rating life coefficient, A2	1
Basic static load rating (C0)	970 kN
Basic dynamic load rating (C)	705 kN
Max operating temperature, Tmax	120 °C
Min operating temperature, Tmin	-40 °C