


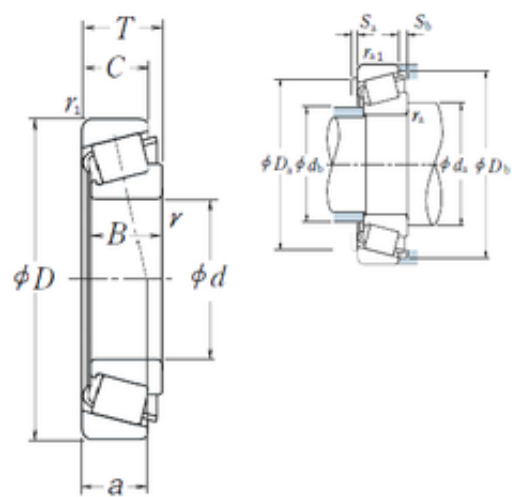

Bearing No. 32326

a	69,2 mm
e	0.36
d	130 mm
D	280 mm
T	98,75 mm
B	93 mm
C	78 mm
B_	93
da	162
Y0	0.92
C0	1150
D_	280
Sb	20.5
Sa	8
db	165
Z_	14
Y1	1.7
C_	78
Cr	84500
DE_	243.726
Iso	-
DI_	172.503
C0r	117000
DA_	36.512
D_b	263
D_a2	233
SBRG	23
SDM_	208.115
D_a1	262
yobi	32326

KBRG	3111
mass	26.6
TC-RA	555.971
r min.	5 mm
LangID	1
TC-DA2	34.22
Da min	233 mm
TC-SLR	66
ALPHA_	13.5
TC-DA1	38.803
Weight	26,6 Kg
T-ALP22	0
da min.	162 mm
r1 min.	4 mm
T-ALP21	27
db max.	165 mm
hidYobi	32326
rb max.	3 mm
T-ALP23	0
Da max.	262 mm
Oil rpm	1800
GRS rpm	1300
ra max.	4 mm
inner r	5
Db min.	263 mm
outer r	4
inner ra	4
hidTable	ecat_NSTPRM
outer rb	3
Category	Bearings
TC-BET23	0
TC-BET21	4

TC-BET22	0
Inventory	0.0
Size (mm)	130x280x98.75
Prod_Type3	TRBSR_MD_A
Width (mm)	98,75
Product Group	B04334
Bearing number	32326
Weight / Kilogram	26.2
Manufacturer Name	NSK
Bore Diameter (mm)	130
Outer Diameter (mm)	280
Minimum Buy Quantity	N/A
Calculation factor (e)	0,36
(Oil) Lubrication Speed	1800 r/min
Calculation factor (Y0)	0,92
(Grease) Lubrication Speed	1300 r/min
Basic dynamic load rating (C)	830 kN
Basic static load rating (C0)	1150 kN