


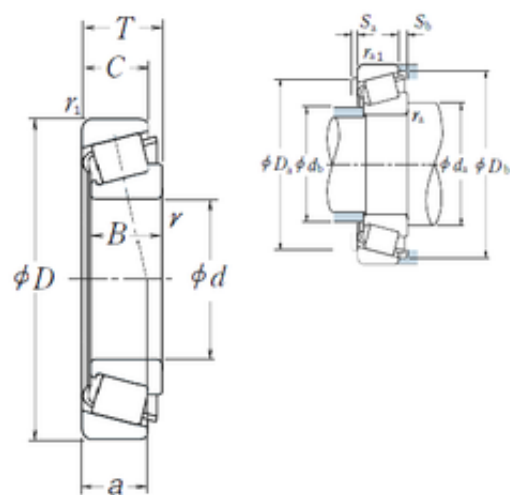

Bearing No. 32332

a	87,1 mm
e	0.37
d	160 mm
D	340 mm
T	121 mm
B	114 mm
C	95 mm
B_	114
da	192
Y0	0.88
C0	1770
D_	340
Sb	26
Sa	10
db	202
Z_	15
Y1	1.6
C_	95
Cr	123000
DE_	294.686
Iso	-
DI_	212.348
C0r	181000
DA_	42.719
D_b	319
D_a2	281
SBRG	23
SDM_	253.517
D_a1	322
yobi	32332

KBRG	3111
mass	48.3
TC-RA	652.372
r min.	5 mm
LangID	1
TC-DA2	39.906
Da min	281 mm
TC-SLR	81
ALPHA_	14
TC-DA1	45.531
Weight	48,3 Kg
T-ALP22	0
da min.	192 mm
r1 min.	4 mm
T-ALP21	28
db max.	202 mm
hidYobi	32332
rb max.	3 mm
T-ALP23	0
Da max.	322 mm
Oil rpm	1400
GRS rpm	1000
ra max.	4 mm
inner r	5
Db min.	319 mm
outer r	4
inner ra	4
hidTable	ecat_NSTPRM
outer rb	3
Category	Bearings
TC-BET23	0
TC-BET21	4

TC-BET22	0
Inventory	0.0
Size (mm)	160x340x121
Prod_Type3	TRBSR_MD_A
Width (mm)	121
Product Group	B04334
Bearing number	32332
Weight / Kilogram	41
Manufacturer Name	NSK
Bore Diameter (mm)	160
Outer Diameter (mm)	340
Minimum Buy Quantity	N/A
Calculation factor (e)	0,37
(Oil) Lubrication Speed	1400 r/min
Calculation factor (Y0)	0,88
(Grease) Lubrication Speed	1000 r/min
Basic dynamic load rating (C)	1210 kN
Basic static load rating (C0)	1770 kN