


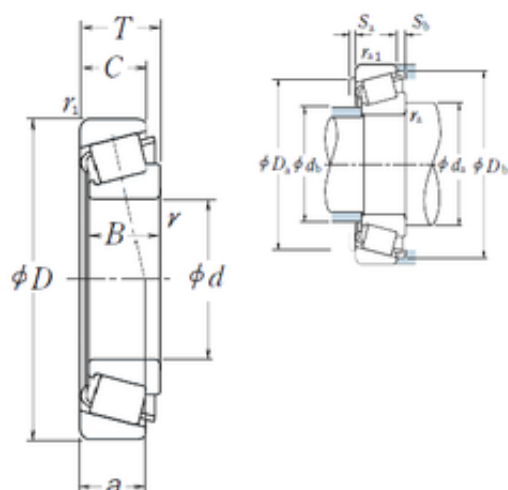

Bearing No. 32334

a	91,3 mm
e	0.37
d	170 mm
D	360 mm
T	127 mm
B	120 mm
C	100 mm
B_	120
da	202
Y0	0.88
C0	2050
D_	360
Sb	27
Sa	10
db	213
Z_	15
Y1	1.6
C_	100
Cr	140000
DE_	311.933
Iso	-
DI_	224.566
C0r	209000
DA_	45.175
D_b	337
D_a2	297
SBRG	23
SDM_	268.25
D_a1	342
yobi	32334

KBRG	3111
mass	57
TC-RA	691.046
r min.	5 mm
LangID	1
TC-DA2	42.118
Da min	297 mm
TC-SLR	88
ALPHA_	14
TC-DA1	48.231
Weight	57 Kg
T-ALP22	0
da min.	202 mm
r1 min.	4 mm
T-ALP21	28
db max.	213 mm
hidYobi	32334
rb max.	3 mm
T-ALP23	0
Da max.	342 mm
Oil rpm	1300
GRS rpm	1000
ra max.	4 mm
inner r	5
Db min.	337 mm
outer r	4
inner ra	4
hidTable	ecat_NSTPRM
outer rb	3
Category	Bearings
TC-BET23	0
TC-BET21	4

TC-BET22	0
Inventory	0.0
Size (mm)	170x360x127
Prod_Type3	TRBSR_MD_A
Width (mm)	127
Product Group	B04334
Bearing number	32334
Weight / Kilogram	54
Manufacturer Name	NSK
Bore Diameter (mm)	170
Outer Diameter (mm)	360
Minimum Buy Quantity	N/A
Calculation factor (e)	0,37
(Oil) Lubrication Speed	1300 r/min
Calculation factor (Y0)	0,88
(Grease) Lubrication Speed	1000 r/min
Basic dynamic load rating (C)	1370 kN
Basic static load rating (C0)	2050 kN