


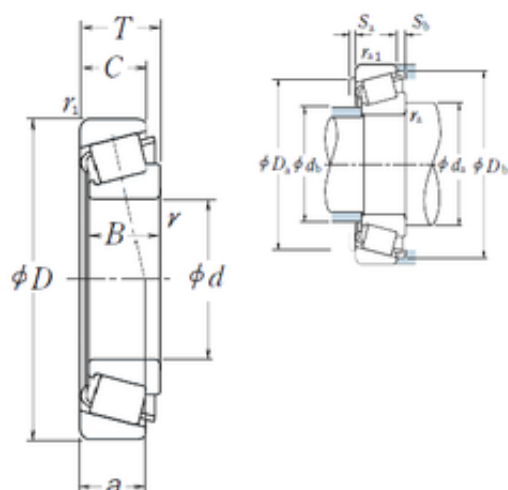

Bearing No. 32336

a	96,6 mm
e	0.37
d	180 mm
D	380 mm
T	134 mm
B	126 mm
C	106 mm
B_	126
da	212
Y0	0.88
C0	2290
D_	380
Sb	28
Sa	10
db	225
Z_	15
Y1	1.6
C_	106
Cr	155000
DE_	326.429
Iso	-
DI_	235.146
C0r	234000
DA_	47.3
D_b	353
D_a2	310
SBRG	23
SDM_	280.788
D_a1	362
yobi	32336

KBRG	3111
mass	66.8
TC-RA	725
r min.	5 mm
LangID	1
TC-DA2	44
Da min	310 mm
TC-SLR	95
ALPHA_	14
TC-DA1	50.6
Weight	66,8 Kg
T-ALP22	0
da min.	212 mm
r1 min.	4 mm
T-ALP21	28
db max.	225 mm
hidYobi	32336
rb max.	3 mm
T-ALP23	0
Da max.	362 mm
Oil rpm	1300
GRS rpm	950
ra max.	4 mm
inner r	5
Db min.	353 mm
outer r	4
inner ra	4
hidTable	ecat_NSTPRM
outer rb	3
Category	Bearings
TC-BET23	0
TC-BET21	4

TC-BET22	0
Inventory	0.0
Size (mm)	180x380x134
Prod_Type3	TRBSR_MD_A
Width (mm)	134
Product Group	B04334
Bearing number	32336
Weight / Kilogram	70
Manufacturer Name	NSK
Bore Diameter (mm)	180
Outer Diameter (mm)	380
Minimum Buy Quantity	N/A
Calculation factor (e)	0,37
(Oil) Lubrication Speed	1300 r/min
Calculation factor (Y0)	0,88
(Grease) Lubrication Speed	950 r/min
Basic dynamic load rating (C)	1520 kN
Basic static load rating (C0)	2290 kN