


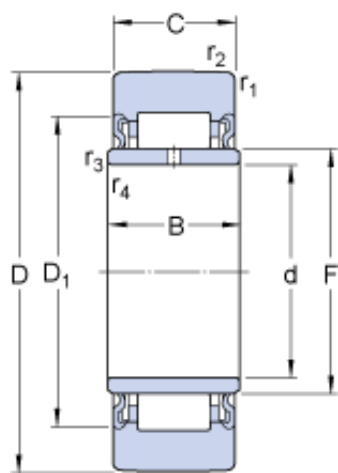

Bearing No. NA 2200.2RS

F	14 mm
D	30 mm
d	10 mm
C	13.8 mm
B	14 mm
Bore	0.394 Inch 10 Millimeter
Noun	Bearing
UNSPSC	31171530
Profile	Yoke Type
Category	Cam Followers Yoke Type
Inventory	0.0
Enclosure	Sealed
Size (mm)	10x30x13.8
Width (mm)	13,8
Weight / LBS	0.132
maximum rpm:	6300 RPM
Roller Width	0.543 Inch 13.8 Millimeter
roller width:	14 mm
Product Group	B04144
Inch - Metric	Metric
roller shape:	Crowned
D ₁	20 mm
closure type:	Sealed
D ₁	20 mm
Limiting speed	6300 r/min
bore diameter:	10 mm
Other Features	Caged With Inner Ring Lip Seal

Keyword String	Cam Follower
standards met:	ANSI/ABMA Standard 18.1
Relubricatable	Yes
Bearing number	NA 2200.2RS
Roller Diameter	1.181 Inch 30 Millimeter
Rolling Element	Needle Bearing
finish/coating:	Uncoated
Long Description	10MM Bore; 30MM Roller Diameter; 13.8MM Roller Width; Crowned Roller; Yoke Type; Sealed; Needle Bearing; Relubricatable
roller material:	Chrome Steel
bearing element:	Needle Rollers
Manufacturer URL	http://www.skf.com
roller diameter:	30 mm
Weight / Kilogram	0.06
Manufacturer Name	SKF
Bore Diameter (mm)	10
Mass support roller	0.06 kg
Outer Diameter (mm)	30
Minimum Buy Quantity	N/A
$r_{3,4}$ min.	0.3 mm
$r_{1,2}$ min.	0.6 mm
Harmonized Tariff Code	8482.40.00.00
$r_{3,4}$ - min.	0.3 mm
Roller Surface Profile	Crowned
$r_{1,2}$ - min.	0.6 mm
Manufacturer Item Number	NA 2200.2RS
lubrication hole location:	Inner Ring
axial static load	7.2 kN

capacity:	
Basic dynamic load rating C	6.6 kN
axial dynamic load capacity:	6.44 kN
radial static load capacity:	17 kN
operating temperature range:	Maximum of +280 °F
Basic dynamic load rating - C	6.6 kN
radial dynamic load capacity:	12 kN
Fatigue load limit P_u	0.88 kN
Fatigue load limit - P_u	0.88 kN
Basic static load rating C_0	7.5 kN
Basic static load rating - C_0	7.5 kN
Maximum dynamic radial loads - F_r	12 kN
Maximum static radial loads - F_{0r}	17.3 kN
Maximum dynamic radial load F_r max.	12 kN
Maximum static radial load F_{0r} max.	17.3 kN