




Bearing No. NA 2205.2RSX

B	18 mm
F	30 mm
D	52 mm
d	25 mm
C	17.8 mm
Bore	0.984 Inch 25 Millimeter
Noun	Bearing
UNSPSC	31171530
Profile	Yoke Type
Category	Cam Followers Yoke Type
Inventory	0.0
Enclosure	Sealed
Size (mm)	25x52x17.8
Width (mm)	17,8
Weight / LBS	0.463
Roller Width	0.701 Inch 17.8 Millimeter
D ₁	38 mm
Product Group	B04144
D ₁	38 mm
Inch - Metric	Metric
Keyword String	Cam Follower
Other Features	Caged With Inner Ring Lip Seal
Relubricatable	Yes
Bearing number	NA 2205.2RSX
Limiting speed	3400 r/min
Rolling Element	Needle Bearing
Roller Diameter	2.047 Inch 52

	Millimeter
Manufacturer URL	http://www.skf.com
Long Description	25MM Bore; 52MM Roller Diameter; 17.8MM Roller Width; Flat Roller; Yoke Type; Sealed; Needle Bearing; Relubricatable
Weight / Kilogram	0.21
Manufacturer Name	SKF
Bore Diameter (mm)	25
Outer Diameter (mm)	52
Mass support roller	0.21 kg
Minimum Buy Quantity	N/A
$r_{3,4}$ min.	0.3 mm
$r_{1,2}$ min.	1 mm
$r_{1,2}$ - min.	1 mm
Harmonized Tariff Code	8482.40.00.00
$r_{3,4}$ - min.	0.3 mm
Roller Surface Profile	Flat
Manufacturer Item Number	NA 2205.2RSX
Basic dynamic load rating C	16.8 kN
Basic dynamic load rating - C	16.8 kN
Fatigue load limit P_u	2.4 kN
Fatigue load limit - P_u	2.4 kN
Basic static load rating C_0	20 kN
Basic static load rating - C_0	20 kN
Maximum dynamic radial loads - F_r	17.3 kN
Maximum static radial	24.5 kN

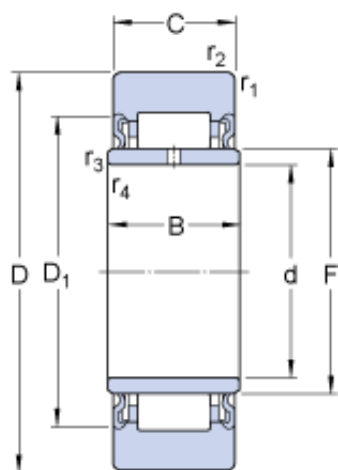

loads - F_{0r}	
Maximum dynamic radial load F_r max.	17.3 kN
Maximum static radial load F_{0r} max.	24.5 kN