


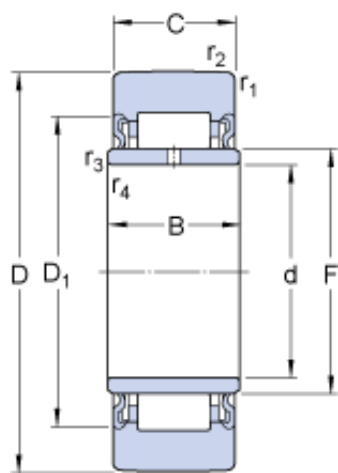

Bearing No. NA 2206.2RS

F	35 mm
D	62 mm
d	30 mm
C	19.8 mm
B	20 mm
Bore	1.181 Inch 30 Millimeter
Noun	Bearing
UNSPSC	31171530
Profile	Yoke Type
Category	Cam Followers Yoke Type
Inventory	0.0
Enclosure	Sealed
Size (mm)	30x62x19.8
Width (mm)	19,8
Weight / LBS	0.705
maximum rpm:	2600 RPM
Roller Width	0.78 Inch 19.8 Millimeter
roller width:	19.8 mm
Product Group	B04144
Inch - Metric	Metric
roller shape:	Crowned
D ₁	43 mm
closure type:	Sealed
D ₁	43 mm
Limiting speed	2800 r/min
bore diameter:	30 mm
Other Features	Caged With Inner Ring Lip Seal

Keyword String	Cam Follower
standards met:	ANSI/ABMA Standard 18.1
Relubricatable	Yes
Bearing number	NA 2206.2RS
Roller Diameter	2.441 Inch 62 Millimeter
Rolling Element	Needle Bearing
finish/coating:	Uncoated
Long Description	30MM Bore; 62MM Roller Diameter; 19.8MM Roller Width; Crowned Roller; Yoke Type; Sealed; Needle Bearing; Relubricatable
roller material:	Chrome Steel
bearing element:	Needle Rollers
Manufacturer URL	http://www.skf.com
roller diameter:	62 mm
Weight / Kilogram	0.32
Manufacturer Name	SKF
Bore Diameter (mm)	30
Mass support roller	0.32 kg
Outer Diameter (mm)	62
Minimum Buy Quantity	N/A
$r_{3,4}$ min.	0.3 mm
$r_{1,2}$ min.	1 mm
Harmonized Tariff Code	8482.40.00.00
$r_{3,4}$ - min.	0.3 mm
Roller Surface Profile	Crowned
$r_{1,2}$ - min.	1 mm
Manufacturer Item Number	NA 2206.2RS
lubrication hole location:	Inner Ring
axial static load	24.5 kN

capacity:	
Basic dynamic load rating C	17.9 kN
axial dynamic load capacity:	17.6 kN
radial static load capacity:	40.5 kN
operating temperature range:	Maximum of +280 °F
Basic dynamic load rating - C	17.9 kN
radial dynamic load capacity:	28.5 kN
Fatigue load limit P_u	3.05 kN
Fatigue load limit - P_u	3 kN
Basic static load rating C_0	25.5 kN
Basic static load rating - C_0	25.5 kN
Maximum dynamic radial loads - F_r	28.5 kN
Maximum static radial loads - F_{0r}	40.5 kN
Maximum dynamic radial load F_r max.	28.5 kN
Maximum static radial load F_{0r} max.	40.5 kN