


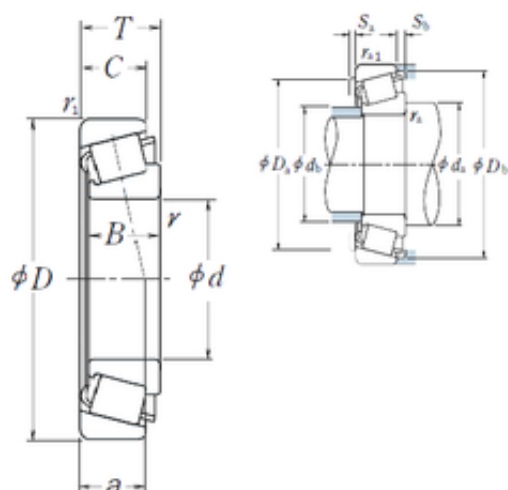

Bearing No. 32340

D	420 mm
d	200 mm
T	146 mm
B	138 mm
C	115 mm
a	106,7 mm
e	0.37
Cr	185000
Y0	0.88
db	253
da	239
Y1	1.6
B_	138
Sb	31
C0	2870
Sa	11
D_	420
Z_	16
C_	115
C0r	292000
DA_	50.41
Iso	-
DE_	362.673
D_b	392
DI_	265.835
SBRG	23
SDM_	314.254
D_a2	346
KBRG	3111
yobi	32340

D_a1	398
mass	90.9
TC-RA	804.939
r min.	6 mm
Weight	90,9 Kg
TC-DA1	53.84
TC-DA2	46.98
TC-SLR	103
Da min	346 mm
LangID	1
ALPHA_	14
Db min.	392 mm
Oil rpm	1100
db max.	253 mm
Da max.	398 mm
ra max.	5 mm
hidYobi	32340
da min.	239 mm
T-ALP21	28
rb max.	4 mm
T-ALP22	0
T-ALP23	0
GRS rpm	800
inner r	6
outer r	5
r1 min.	5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	3
inner ra	5
outer rb	4
TC-BET22	50

Size (mm)	200x420x146
Width (mm)	146
Prod_Type3	TRBSR_MD_A
Bearing number	32340
Bore Diameter (mm)	200
Outer Diameter (mm)	420
Calculation factor (e)	0,37
Calculation factor (Y0)	0,88
(Oil) Lubrication Speed	1100 r/min
(Grease) Lubrication Speed	800 r/min
Basic dynamic load rating (C)	1820 kN
Basic static load rating (C0)	2870 kN