


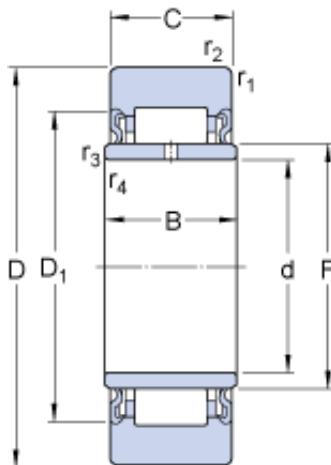

Bearing No. NA 2207.2RSX

d	35 mm
D	72 mm
C	22.7 mm
B	23 mm
F	42 mm
Size (mm)	35x72x22.7
Width (mm)	22,7
D ₁	50 mm
d ₁	50 mm
Bearing number	NA 2207.2RSX
Limiting speed	2200 r/min
Bore Diameter (mm)	35
Mass support roller	0.51 kg
Outer Diameter (mm)	72
r _{1,2} min.	1.1 mm
r _{3,4} min.	0.6 mm
r _{3,4} - min.	0.6 mm
r _{1,2} - min.	1.1 mm
Basic dynamic load rating C	22.4 kN
Basic dynamic load rating - C	22.4 kN
Fatigue load limit P _u	4.3 kN
Fatigue load limit - P _u	4.3 kN
Basic static load rating C ₀	35.5 kN
Basic static load rating - C ₀	35.5 kN
Maximum dynamic radial loads - F _r	38 kN
Maximum static radial	54 kN

loads - F_{0r}	
Maximum dynamic radial load F_r max.	38 kN
Maximum static radial load F_{0r} max.	54 kN