


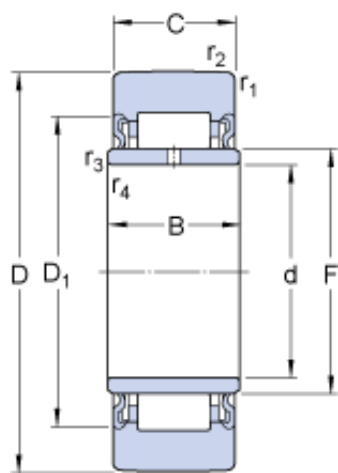

Bearing No. NA 2210.2RS

B	23 mm
F	58 mm
D	90 mm
d	50 mm
C	22.7 mm
Bore	1.969 Inch 50 Millimeter
Noun	Bearing
UNSPSC	31171530
Profile	Yoke Type
Category	Cam Followers Yoke Type
Enclosure	Sealed
Size (mm)	50x90x22.7
Inventory	0.0
Width (mm)	22,7
Roller Width	0.894 Inch 22.7 Millimeter
maximum rpm:	1600 RPM
Weight / LBS	1.521
D ₁	68 mm
roller width:	22.7 mm
Product Group	B04144
Inch - Metric	Metric
closure type:	Sealed
roller shape:	Crowned
D ₁	68 mm
Relubricatable	Yes
Keyword String	Cam Follower
Other Features	Caged With Inner Ring Lip Seal

Bearing number	NA 2210.2RS
Limiting speed	1600 r/min
bore diameter:	50 mm
standards met:	ANSI/ABMA Standard 18.1
Rolling Element	Needle Bearing
finish/coating:	Uncoated
Roller Diameter	3.543 Inch 90 Millimeter
roller material:	Chrome Steel
Long Description	50MM Bore; 90MM Roller Diameter; 22.7MM Roller Width; Crowned Roller; Yoke Type; Sealed; Needle Bearing; Relubricatable
bearing element:	Needle Rollers
Manufacturer URL	http://www.skf.com
roller diameter:	90 mm
Weight / Kilogram	0.69
Manufacturer Name	SKF
Bore Diameter (mm)	50
Mass support roller	0.69 kg
Outer Diameter (mm)	90
Minimum Buy Quantity	N/A
r _{3,4} min.	0.6 mm
r _{1,2} min.	1.1 mm
Harmonized Tariff Code	8482.40.00.00
r _{3,4} - min.	0.6 mm
Roller Surface Profile	Crowned
r _{1,2} - min.	1.1 mm
Manufacturer Item Number	NA 2210.2RS
lubrication hole location:	Inner Ring
axial static load	41.5 kN

capacity:	
Basic dynamic load rating C	28.1 kN
axial dynamic load capacity:	27 kN
radial static load capacity:	52 kN
operating temperature range:	Maximum of +280 °F
Basic dynamic load rating - C	28.1 kN
radial dynamic load capacity:	36.5 kN
Fatigue load limit P_u	5.3 kN
Fatigue load limit - P_u	5.3 kN
Basic static load rating C_0	43 kN
Basic static load rating - C_0	43 kN
Maximum dynamic radial loads - F_r	34.5 kN
Maximum static radial loads - F_{0r}	50 kN
Maximum dynamic radial load F_r max.	34.5 kN
Maximum static radial load F_{0r} max.	50 kN