


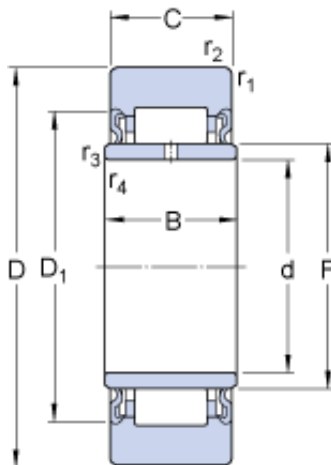

Bearing No. NA 2210.2RSX

d	50 mm
D	90 mm
C	22.7 mm
B	23 mm
F	58 mm
Size (mm)	50x90x22.7
Width (mm)	22,7
D ₁	68 mm
D ₁	68 mm
Bearing number	NA 2210.2RSX
Limiting speed	1600 r/min
Bore Diameter (mm)	50
Mass support roller	0.69 kg
Outer Diameter (mm)	90
r _{1,2} min.	1.1 mm
r _{3,4} min.	0.6 mm
r _{3,4} - min.	0.6 mm
r _{1,2} - min.	1.1 mm
Basic dynamic load rating C	28.1 kN
Basic dynamic load rating - C	28.1 kN
Fatigue load limit P _u	5.3 kN
Fatigue load limit - P _u	5.3 kN
Basic static load rating C ₀	43 kN
Basic static load rating - C ₀	43 kN
Maximum dynamic radial loads - F _r	34.5 kN
Maximum static radial	50 kN

loads - F_{0r}	
Maximum dynamic radial load F_r max.	34.5 kN
Maximum static radial load F_{0r} max.	50 kN