


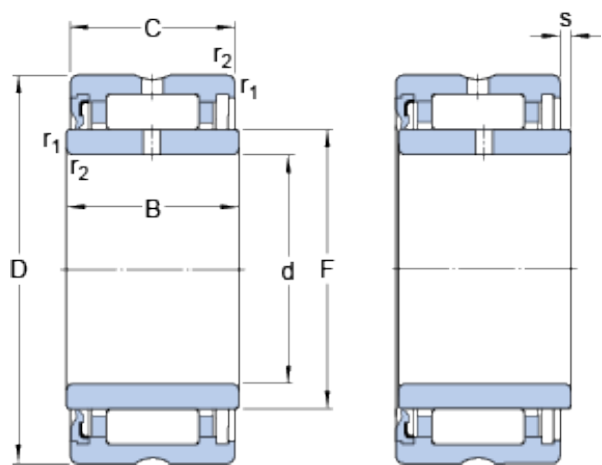

Bearing No. NA 4908 RS

|                             |            |
|-----------------------------|------------|
| D                           | 62 mm      |
| d                           | 40 mm      |
| B                           | 23 mm      |
| C                           | 22 mm      |
| F                           | 48 mm      |
| s                           | 0.5 mm     |
| s max.                      | 0.5 mm     |
| Category                    | Bearings   |
| Size (mm)                   | 62x40x23   |
| Inventory                   | 0.0        |
| Width (mm)                  | 23         |
| Mass bearing                | 0.25 kg    |
| Product Group               | B04144     |
| Limiting speed              | 4000 r/min |
| Bearing number              | NA 4908 RS |
| Weight / Kilogram           | 0          |
| Manufacturer Name           | SKF        |
| r <sub>a</sub> max.         | 0.6 mm     |
| Bore Diameter (mm)          | 62         |
| d <sub>a</sub> min.         | 44 mm      |
| D <sub>a</sub> max.         | 58 mm      |
| Outer Diameter (mm)         | 40         |
| r <sub>a</sub> - max.       | 0.6 mm     |
| D <sub>a</sub> - max.       | 58 mm      |
| d <sub>a</sub> - min.       | 44 mm      |
| Minimum Buy Quantity        | N/A        |
| r <sub>1,2</sub> min.       | 0.6 mm     |
| r <sub>1,2</sub> - min.     | 0.6 mm     |
| Basic dynamic load rating C | 36.9 kN    |
|                             |            |

|                                  |         |
|----------------------------------|---------|
| Basic dynamic load rating - C    | 36.9 kN |
| Fatigue load limit $P_u$         | 7.1 kN  |
| Fatigue load limit - $P_u$       | 7.1 kN  |
| Basic static load rating $C_0$   | 58.5 kN |
| Basic static load rating - $C_0$ | 58.5 kN |