


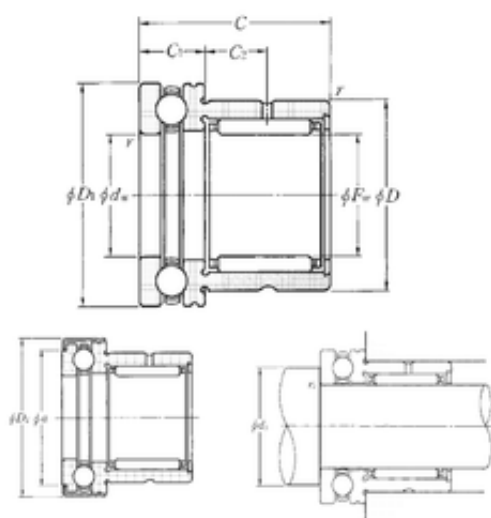

Bearing No. NKX30T2Z

C	30 mm
a	42,7 mm
d	30 mm
D	42 mm
Dw	2.5 mm
Cr	22.3 kN
Lw	15.8 mm
C1	11 mm
C2	9,5 mm
dw	30 mm
D2	48 mm
D1	47 mm
Fw	30 mm
Ca	20.4 kN
C0r	39.5 kN
Dw1	6.35 mm
C0a	42 kN
Mass	0.15 kg
da min	40 mm
Weight	0,148 Kg
r min.	0,6 mm
rs min	0.6 mm
ras max	0.6 mm
ra max.	0,6 mm
da min.	40 mm
Category	Bearings
Inventory	0.0
Nlim (oil)	6,200 rpm
Nlim (grease)	4,300 rpm
Product Group	B04144

Bearing number	NKX30T2Z
Precision class	P0
Manufacturer Name	NTN
Weight / Kilogram	0.146
Bore Diameter (mm)	30
Outer Diameter (mm)	48
Minimum Buy Quantity	N/A
(Grease) Lubrication Speed	4300 r/min
Static load rating axial (C0)	42 kN
Dynamic load rating axial (C)	20,4 kN
Lubrication hole on outer ring	Oui/Yes
Static load rating radial (C0)	39,5 kN
Dynamic load rating radial (C)	22,3 kN
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C