


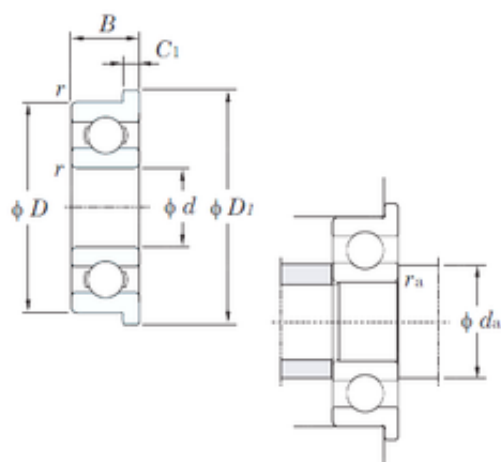

Bearing No. MLF4008

|                         |             |
|-------------------------|-------------|
| D                       | 8 mm        |
| d                       | 4 mm        |
| B                       | 2 mm        |
| C                       | 2 mm        |
| C2                      | 0,6 mm      |
| C1                      | 0,6 mm      |
| Cu                      | 0.004       |
| f0                      | 13.9        |
| D2                      | 9,2 mm      |
| D1                      | 9,2 mm      |
| Cr                      | 0.490       |
| C0r                     | 0.14        |
| r min.                  | 0,1 mm      |
| Weight                  | 0,0005 Kg   |
| r(min)                  | 0.1         |
| r1 min.                 | 0,08 mm     |
| ba min.                 | 4,8 mm      |
| ra max.                 | 0,08 mm     |
| da(min)                 | 4.8         |
| ra(max)                 | 0.08        |
| Oil lub.                | 72000       |
| Size (mm)               | 4x8x2       |
| Width (mm)              | 2           |
| Grease lub.             | 61000       |
| Bearing No.             | MLF4008     |
| Bearing number          | MLF4008     |
| (Refer.)Mass(g)         | 0.5         |
| Bore Diameter (mm)      | 4           |
| Outer Diameter (mm)     | 8           |
| (Oil) Lubrication Speed | 72000 r/min |

|                               |             |
|-------------------------------|-------------|
| (Grease) Lubrication Speed    | 61000 r/min |
| Basic static load rating (C0) | 0,14 kN     |
| Basic dynamic load rating (C) | 0,4 kN      |