


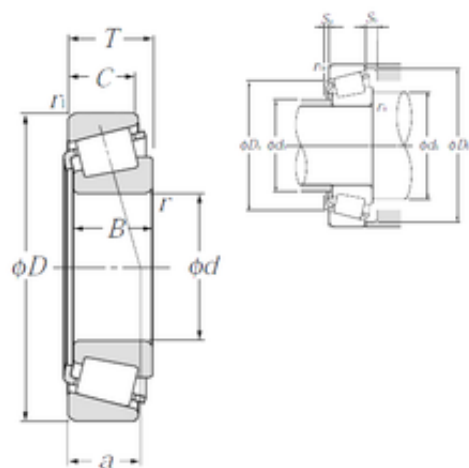

Bearing No. 32926

D	180 mm
d	130 mm
T	32 mm
B	30 mm
C	26 mm
a	34 mm
e	0.37
Y0	0.88
Sb	6 mm
Y2	1.6
Sa	6 mm
Mass	2.22 kg
Cb min	6 mm
da max	140 mm
Da max	170 mm
Weight	2,22 Kg
r min.	2 mm
rs min	2 mm
Da min	163,5 mm
db min	142.5 mm
Db min	174 mm
Ca min	6 mm
ra max	2 mm
r1a max	2 mm
r1s min	2 mm
ra max.	2 mm
Db min.	174 mm
db max.	139 mm
Da max.	170 mm
da min.	140 mm

r1 min.	2 mm
ra1 max.	2 mm
Category	Roller Bearings
Size (mm)	130x180x32
Inventory	0.0
Nlim (oil)	2,400 rpm
cup width:	25 mm
Width (mm)	32
cone width:	32 mm
Nlim (grease)	1,800 rpm
Product Group	B04334
closure type:	Open
bore diameter:	130 mm
assembly type:	Cone & Cup
fillet radius:	2 mm
overall width:	32 mm
Bearing number	32926
finish/coating:	Uncoated
Dynamic load, C	142 kN
Static load, C0	252 kN
Manufacturer Name	NTN
Weight / Kilogram	2.202
bearing material:	Through Hardened Steel
outside diameter:	180 mm
Bore Diameter (mm)	130
Outer Diameter (mm)	180
Minimum Buy Quantity	N/A
static load capacity:	252000 N
abma precision rating:	Class 0
dynamic load capacity:	142000 N
Calculation factor (e)	0,37
(Oil) Lubrication Speed	2 400 r/min

Calculation factor (Y0)	0,88
(Grease) Lubrication Speed	1 800 r/min
manufacturer product page:	Click here
Rating life coefficient, A2	1
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	252 kN
Basic dynamic load rating (C)	142 kN
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C