


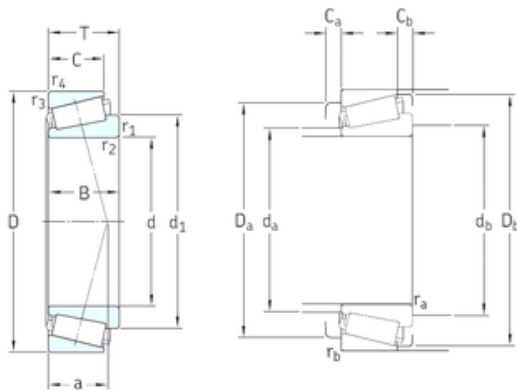

Bearing No. 32926

D	180 mm
d	130 mm
T	32 mm
B	32 mm
C	25 mm
a	31 mm
d1	153 mm
da max	141 mm
Da min	167 mm
Weight	2,4 Kg
db min	139 mm
series:	329
rb max.	1,5 mm
ra max.	2 mm
Db min.	173 mm
Da max.	171 mm
r3 min.	1,5 mm
Cb min.	7 mm
Ca min.	6 mm
r4 min.	1,5 mm
r2 min.	2 mm
r1 min.	2 mm
Category	Roller Bearings
Size (mm)	130x180x32
Inventory	0.0
Width (mm)	32
cup width:	25 mm
cone width:	32 mm
Mass bearing	2.39 kg
maximum rpm:	3600 RPM

flange type:	Non-Flanged Cup
closure type:	Open
Product Group	B04334
assembly type:	Cone & Cup
bore diameter:	130 mm
cage material:	Steel
Bearing number	32926
Limiting speed	3600 r/min
Reference speed	2400 r/min
finish/coating:	Uncoated
Dimension series	2CC
Manufacturer Name	SKF
outside diameter:	180 mm
Weight / Kilogram	2.451
C_b min.	7 mm
r_a max.	2 mm
r_b max.	1.5 mm
d_a max.	141 mm
C_a min.	6 mm
D_b min.	173 mm
D_a max.	170 mm
Bore Diameter (mm)	130
D_a min.	167 mm
d_b min.	142 mm
Outer Diameter (mm)	180
Calculation factor e	0.33
Calculation factor Y	1.8
$r_{1,2}$ min.	2 mm
Minimum Buy Quantity	N/A
$r_{3,4}$ min.	1.5 mm
d_1 ?	153.9 mm
static load capacity:	365 kN

dynamic load capacity:	198 kN
Calculation factor (e)	0,33
Calculation factor (Y)	1,8
Fatigue load limit (Pu)	38
Basic dynamic load rating C	245 kN
operating temperature range:	Maximum of +250 °F
Basic dynamic load rating (C)	198 kN
Basic static load rating (C0)	365 kN
Fatigue load limit P_u	38 kN
Calculation factor Y_0	1
Basic static load rating C_0	365 kN