


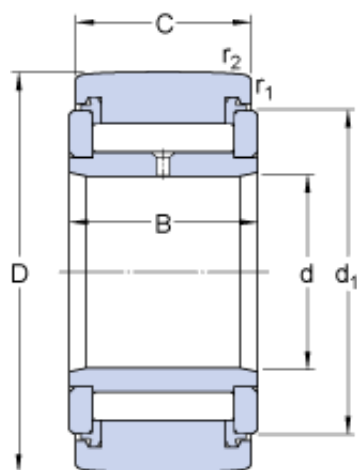

Bearing No. NATV 12 PPA

d	12 mm
D	32 mm
C	14 mm
B	15 mm
Noun	Bearing
Bore	0.472 Inch 12 Millimeter
UNSPSC	31171530
Profile	Yoke Type
Category	Cam Followers Yoke Type
Enclosure	Sealed
Inventory	0.0
Size (mm)	12x32x14
Width (mm)	14
Roller Width	0.551 Inch 14 Millimeter
Weight / LBS	0.159
Product Group	B04144
d ₁	25 mm
Inch - Metric	Metric
d ₁	25 mm
Keyword String	Cam Follower
Other Features	Full Complement With Flanged Inner Ring 3 Stage Sealing
Relubricatable	Yes
Bearing number	NATV 12 PPA
Limiting speed	3000 r/min
Rolling Element	Needle Bearing
Roller Diameter	1.26 Inch 32 Millimeter

Long Description	12MM Bore; 32MM Roller Diameter; 14MM Roller Width; Crowned Roller; Yoke Type; Sealed; Needle Bearing; Relubricatable
Manufacturer URL	http://www.skf.com
Weight / Kilogram	0.073
Manufacturer Name	SKF
Bore Diameter (mm)	12
Mass support roller	0.069 kg
Outer Diameter (mm)	32
Minimum Buy Quantity	N/A
$r_{1,2}$ min.	0.6 mm
$r_{1,2}$ - min.	0.6 mm
Roller Surface Profile	Crowned
Harmonized Tariff Code	8482.40.00.00
Manufacturer Item Number	NATV 12 PPA
Basic dynamic load rating C	9.35 kN
Basic dynamic load rating - C	9.4 kN
Fatigue load limit P_u	1.76 kN
Fatigue load limit - P_u	1.8 kN
Basic static load rating C_0	15.3 kN
Basic static load rating - C_0	15.3 kN
Maximum static radial loads - F_r	10.6 kN
Maximum static radial loads - F_{0r}	15 kN
Maximum dynamic radial loads F_r max.	10.6 kN

Maximum static radial loads F_{0r} max.	15 kN
---	-------