


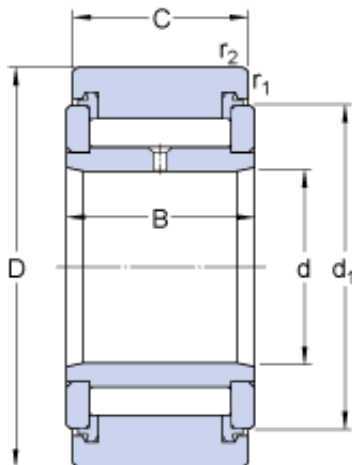

Bearing No. NATV 25 PPXA

|                                           |              |
|-------------------------------------------|--------------|
| d                                         | 25 mm        |
| D                                         | 52 mm        |
| C                                         | 24 mm        |
| B                                         | 25 mm        |
| Category                                  | Bearings     |
| Inventory                                 | 0.0          |
| Size (mm)                                 | 25x52x24     |
| Width (mm)                                | 24           |
| d <sub>1</sub>                            | 41.5 mm      |
| d <sub>1</sub>                            | 41.5 mm      |
| Product Group                             | B04144       |
| Bearing number                            | NATV 25 PPXA |
| Limiting speed                            | 1600 r/min   |
| Weight / Kilogram                         | 0.285        |
| Manufacturer Name                         | SKF          |
| Bore Diameter (mm)                        | 25           |
| Mass support roller                       | 0.28 kg      |
| Outer Diameter (mm)                       | 52           |
| Minimum Buy Quantity                      | N/A          |
| r <sub>1,2</sub> min.                     | 1 mm         |
| r <sub>1,2</sub> - min.                   | 1 mm         |
| Basic dynamic load rating C               | 19.8 kN      |
| Basic dynamic load rating - C             | 19.8 kN      |
| Fatigue load limit P <sub>u</sub>         | 5.3 kN       |
| Fatigue load limit - P <sub>u</sub>       | 5.3 kN       |
| Basic static load rating C <sub>0</sub>   | 44 kN        |
| Basic static load rating - C <sub>0</sub> | 44 kN        |

|                                           |         |
|-------------------------------------------|---------|
| Maximum static radial loads - $F_r$       | 28.5 kN |
| Maximum static radial loads - $F_{0r}$    | 40.5 kN |
| Maximum dynamic radial loads $F_r$ max.   | 28.5 kN |
| Maximum static radial loads $F_{0r}$ max. | 40.5 kN |