


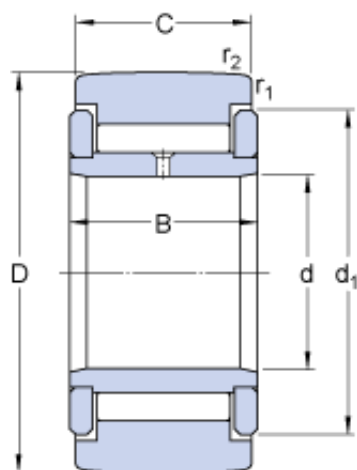

Bearing No. NATV 30

d	30 mm
D	62 mm
C	28 mm
B	29 mm
Noun	Bearing
Bore	1.181 Inch 30 Millimeter
UNSPSC	31171530
Profile	Yoke Type
Category	Cam Followers Yoke Type
Enclosure	Sealed
Inventory	0.0
Size (mm)	30x62x28
Width (mm)	28
Roller Width	1.102 Inch 28 Millimeter
Weight / LBS	1.058
Product Group	B04144
d ₁	51 mm
Inch - Metric	Metric
d ₁	51 mm
Keyword String	Cam Follower
Other Features	Full Complement With Flanged Inner Ring Gap Seal
Relubricatable	Yes
Bearing number	NATV 30
Limiting speed	1400 r/min
Rolling Element	Needle Bearing
Roller Diameter	2.441 Inch 62 Millimeter

Long Description	30MM Bore; 62MM Roller Diameter; 28MM Roller Width; Crowned Roller; Yoke Type; Sealed; Needle Bearing; Relubricatable
Manufacturer URL	http://www.skf.com
Weight / Kilogram	0.48
Manufacturer Name	SKF
Bore Diameter (mm)	30
Mass support roller	0.48 kg
Outer Diameter (mm)	62
Minimum Buy Quantity	N/A
$r_{1,2}$ min.	1 mm
$r_{1,2}$ - min.	1 mm
Roller Surface Profile	Crowned
Harmonized Tariff Code	8482.40.00.00
Manufacturer Item Number	NATV 30
Basic dynamic load rating C	29.2 kN
Basic dynamic load rating - C	29.2 kN
Fatigue load limit P_u	7.65 kN
Fatigue load limit - P_u	7.6 kN
Basic static load rating C_0	62 kN
Basic static load rating - C_0	62 kN
Maximum static radial loads - F_r	34.5 kN
Maximum static radial loads - F_{0r}	49 kN
Maximum dynamic radial loads F_r max.	34.5 kN

Maximum static radial loads F_{0r} max.	49 kN
---	-------