




Bearing No. NATV 5 PPA

d	5 mm
D	16 mm
C	11 mm
B	12 mm
Noun	Bearing
Bore	0.197 Inch 5 Millimeter
UNSPSC	31171530
Profile	Yoke Type
Category	Cam Followers Yoke Type
Enclosure	Sealed
Inventory	0.0
Size (mm)	5x16x11
Width (mm)	11
Roller Width	0.433 Inch 11 Millimeter
Weight / LBS	0.033
Product Group	B04144
d ₁	12.5 mm
Inch - Metric	Metric
d ₁	12.5 mm
Keyword String	Cam Follower
Other Features	Full Complement With Flanged Inner Ring 3 Stage Sealing
Relubricatable	Yes
Bearing number	NATV 5 PPA
Limiting speed	4300 r/min
Rolling Element	Needle Bearing
Roller Diameter	0.63 Inch 16 Millimeter
Long Description	5MM Bore; 16MM Roller

	Diameter; 11MM Roller Width; Crowned Roller; Yoke Type; Sealed; Needle Bearing; Relubricatable
Manufacturer URL	http://www.skf.com
Weight / Kilogram	0.017
Manufacturer Name	SKF
Bore Diameter (mm)	5
Mass support roller	0.015 kg
Outer Diameter (mm)	16
Minimum Buy Quantity	N/A
$r_{1,2}$ min.	0.15 mm
$r_{1,2}$ - min.	0.15 mm
Roller Surface Profile	Crowned
Harmonized Tariff Code	8482.40.00.00
Manufacturer Item Number	NATV 5 PPA
Basic dynamic load rating C	4.73 kN
Basic dynamic load rating - C	4.7 kN
Fatigue load limit P_u	0.72 kN
Fatigue load limit - P_u	0.72 kN
Basic static load rating C_0	6.55 kN
Basic static load rating - C_0	6.6 kN
Maximum static radial loads - F_r	4 kN
Maximum static radial loads - F_{0r}	5.7 kN
Maximum dynamic radial loads F_r max.	4.05 kN
Maximum static radial	5.7 kN

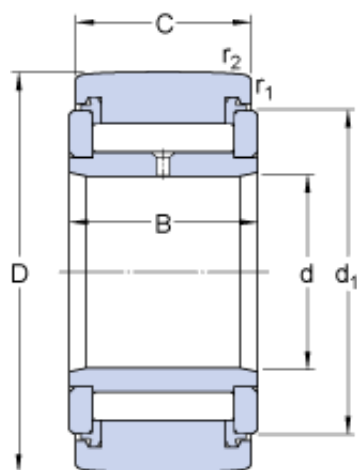

loads F_{0r} max.	
---------------------	--