


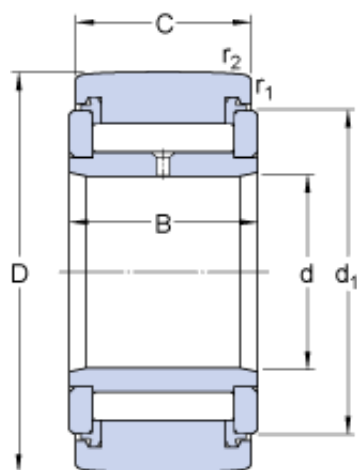

Bearing No. NATV 6 PPA

d	6 mm
D	19 mm
C	11 mm
B	12 mm
Noun	Bearing
Bore	0.236 Inch 6 Millimeter
UNSPSC	31171530
Profile	Yoke Type
Category	Cam Followers Yoke Type
Enclosure	Sealed
Inventory	0.0
Size (mm)	6x19x11
Width (mm)	11
Roller Width	0.433 Inch 11 Millimeter
Weight / LBS	0.046
Product Group	B04144
d ₁	15 mm
Inch - Metric	Metric
d ₁	15 mm
Keyword String	Cam Follower
Other Features	Full Complement With Flanged Inner Ring 3 Stage Sealing
Relubricatable	Yes
Bearing number	NATV 6 PPA
Limiting speed	4000 r/min
Rolling Element	Needle Bearing
Roller Diameter	0.748 Inch 19 Millimeter

Long Description	6MM Bore; 19MM Roller Diameter; 11MM Roller Width; Crowned Roller; Yoke Type; Sealed; Needle Bearing; Relubricatable
Manufacturer URL	http://www.skf.com
Weight / Kilogram	0.024
Manufacturer Name	SKF
Bore Diameter (mm)	6
Mass support roller	0.021 kg
Outer Diameter (mm)	19
Minimum Buy Quantity	N/A
$r_{1,2}$ min.	0.15 mm
$r_{1,2}$ - min.	0.15 mm
Roller Surface Profile	Crowned
Harmonized Tariff Code	8482.40.00.00
Manufacturer Item Number	NATV 6 PPA
Basic dynamic load rating C	5.28 kN
Basic dynamic load rating - C	5.3 kN
Fatigue load limit P_u	0.88 kN
Fatigue load limit - P_u	0.88 kN
Basic static load rating C_0	8 kN
Basic static load rating - C_0	8 kN
Maximum static radial loads - F_r	5.1 kN
Maximum static radial loads - F_{0r}	7.4 kN
Maximum dynamic radial loads F_r max.	5.1 kN

Maximum static radial loads F_{0r} max.	7.35 kN
---	---------