


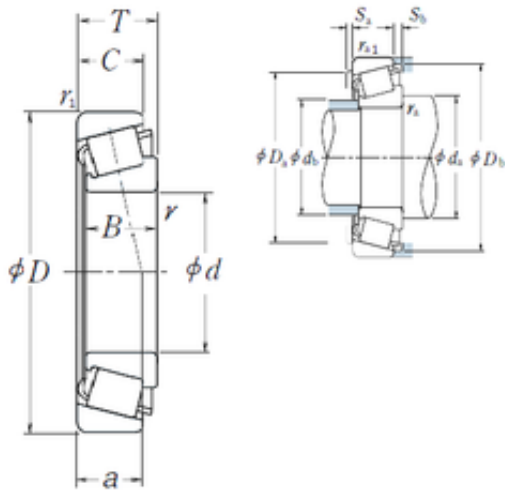

Bearing No. 32980

D	540 mm
d	400 mm
T	87 mm
B	82 mm
C	71 mm
a	100,8 mm
e	0.4
Cr	128000
Y0	0.82
db	428
da	427
Y1	1.5
B_	82
Sb	16
C0	2700
Sa	16
D_	540
Z_	36
C_	71
C0r	276000
DA_	33.718
Iso	-
DE_	504.035
D_b	524
DI_	437.288
SBRG	29
SDM_	470.662
D_a2	499
KBRG	3111
yobi	32980

D_a1	522
mass	52.7
TC-RA	995.439
r min.	5 mm
Weight	52,7 Kg
TC-DA1	34.745
TC-DA2	32.691
TC-SLR	59
Da min	499 mm
LangID	1
ALPHA_	15.083
Db min.	524 mm
Oil rpm	710
db max.	428 mm
Da max.	522 mm
ra max.	4 mm
hidYobi	32980
da min.	427 mm
T-ALP21	30
rb max.	3 mm
T-ALP22	10
T-ALP23	0
GRS rpm	530
inner r	5
outer r	4
r1 min.	4 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	2
inner ra	4
outer rb	3
TC-BET22	0

Size (mm)	400x540x87
Width (mm)	87
Prod_Type3	TRBSR_MD_A
Bearing number	32980
Bore Diameter (mm)	400
Outer Diameter (mm)	540
Calculation factor (e)	0,4
Calculation factor (Y0)	0,82
(Oil) Lubrication Speed	710 r/min
(Grease) Lubrication Speed	530 r/min
Basic dynamic load rating (C)	1250 kN
Basic static load rating (C0)	2700 kN