


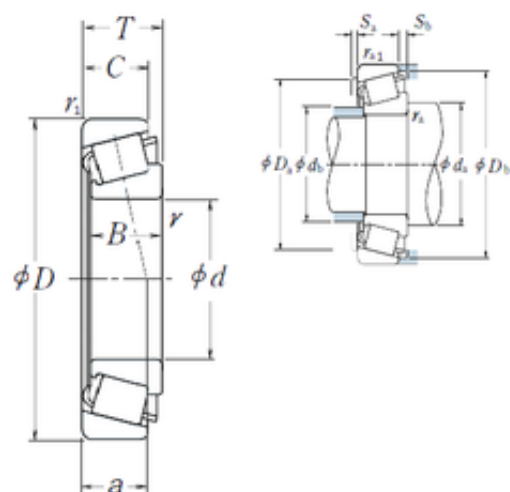

Bearing No. 32984

D	560 mm
d	420 mm
T	87 mm
B	82 mm
C	72 mm
a	106,1 mm
e	0.41
Cr	132000
Y0	0.81
db	448
da	447
Y1	1.5
B_	82
Sb	15
C0	2810
Sa	3.5
D_	560
Z_	37
C_	72
C0r	287000
DA_	34.733
Iso	-
DE_	524.13
D_b	544
DI_	456.083
SBRG	29
SDM_	490.107
D_a2	521
KBRG	3111
yobi	32984

D_a1	542
mass	54.8
TC-RA	1024
r min.	5 mm
Weight	54,8 Kg
TC-DA1	35.742
TC-DA2	33.723
TC-SLR	58
Da min	521 mm
LangID	1
ALPHA_	15.25
Db min.	544 mm
Oil rpm	670
db max.	448 mm
Da max.	542 mm
ra max.	4 mm
hidYobi	32984
da min.	447 mm
T-ALP21	30
rb max.	3 mm
T-ALP22	30
T-ALP23	0
GRS rpm	500
inner r	5
outer r	4
r1 min.	4 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	2
inner ra	4
outer rb	3
TC-BET22	0

Size (mm)	420x560x87
Width (mm)	87
Prod_Type3	TRBSR_MD_A
Bearing number	32984
Bore Diameter (mm)	420
Outer Diameter (mm)	560
Calculation factor (e)	0,41
Calculation factor (Y0)	0,81
(Oil) Lubrication Speed	670 r/min
(Grease) Lubrication Speed	500 r/min
Basic dynamic load rating (C)	1300 kN
Basic static load rating (C0)	2810 kN