


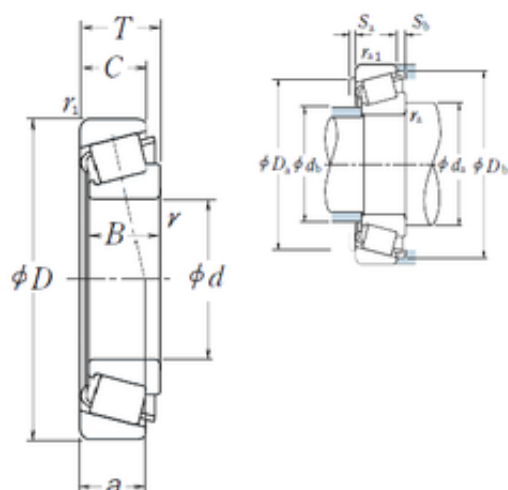

Bearing No. 330/32

D	58 mm
d	32 mm
T	21 mm
B	20 mm
C	16 mm
a	13,8 mm
e	0.31
Cr	4150
Y0	1.1
db	37
da	41
Y1	1.9
B_	20
Sb	4
C0	50
Sa	2
D_	58
Z_	18
C_	16
C0r	5100
DA_	6.277
Iso	-
DE_	51.14
D_b	55
DI_	38.946
SBRG	30
SDM_	45.043
D_a2	50
KBRG	3111
yobi	330/32

D_a1	52
mass	0.225
TC-RA	133.417
r min.	1 mm
Weight	0,225 Kg
TC-DA1	6.597
TC-DA2	5.956
TC-SLR	13
Da min	50 mm
LangID	1
ALPHA_	11.667
Db min.	55 mm
Oil rpm	8500
db max.	37 mm
Da max.	52 mm
ra max.	1 mm
hidYobi	330/32
da min.	41 mm
T-ALP21	23
rb max.	1 mm
T-ALP22	20
T-ALP23	0
GRS rpm	6300
inner r	1
outer r	1
r1 min.	1 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	2
inner ra	1
outer rb	1
TC-BET22	50

Size (mm)	32x58x21
Width (mm)	21
Prod_Type3	TRBSR_MD_A
Bearing number	330/32
Bore Diameter (mm)	32
Outer Diameter (mm)	58
Calculation factor (e)	0,31
Calculation factor (Y0)	1,1
(Oil) Lubrication Speed	8500 r/min
(Grease) Lubrication Speed	6300 r/min
Basic dynamic load rating (C)	41 kN
Basic static load rating (C0)	50 kN