




Bearing No. NU2218-E-TVP2

E	145 mm
F	107 mm
d	90 mm
D	160 mm
B	40 mm
m	3,17 kg / Weight
s	2,5 mm / Axial displacement facility from central position
Size (mm)	90x160x40
Width (mm)	40
n_B	3300 1/min
n_G	5200 1/min / Limiting speed
D_1	139,7 mm
C_r	285000 N / Dynamic load rating (radial)
C_{Or}	315000 N / Static load rating (radial)
Bearing number	NU2218-E-TVP2
C_{ur}	56000 N / Fatigue limit load, radial
r_{min}	2 mm
$r_{1 min}$	2 mm
$r_{a max}$	2 mm
$d_{b min}$	109 mm
$d_{a min}$	101 mm
$d_{a max}$	105 mm
$D_{a max}$	149 mm
$r_{a1 max}$	2 mm

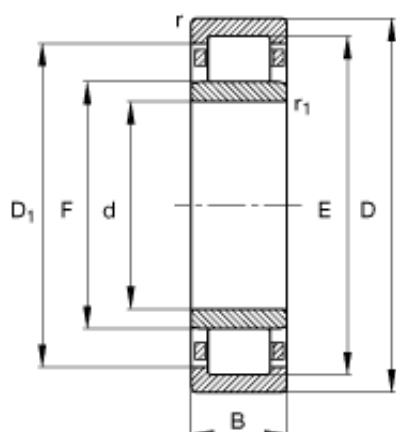

Bore Diameter (mm)	90
Outer Diameter (mm)	160