




Bearing No. NU2216-E-TVP2

E	127,3 mm
F	95,3 mm
d	80 mm
D	140 mm
B	33 mm
m	2,01 kg / Weight
s	1,3 mm / Axial displacement facility from central position
Size (mm)	80x140x33
Width (mm)	33
n_B	3450 1/min
n_G	6100 1/min / Limiting speed
D_1	122,9 mm
C_r	221000 N / Dynamic load rating (radial)
C_{Or}	244000 N / Static load rating (radial)
Bearing number	NU2216-E-TVP2
C_{ur}	43500 N / Fatigue limit load, radial
r_{min}	2 mm
$r_{1 min}$	2 mm
$r_{a max}$	2 mm
$d_{b min}$	97 mm
$d_{a min}$	91 mm
$d_{a max}$	94 mm
$D_{a max}$	129 mm
$r_{a1 max}$	2 mm

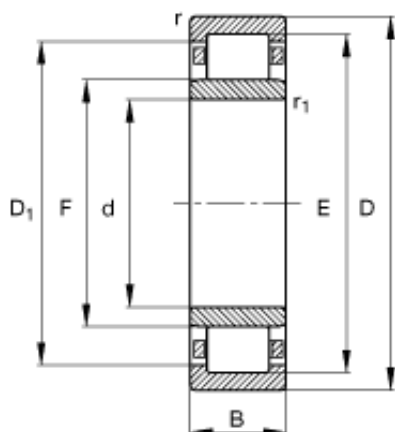

Bore Diameter (mm)	80
Outer Diameter (mm)	140