


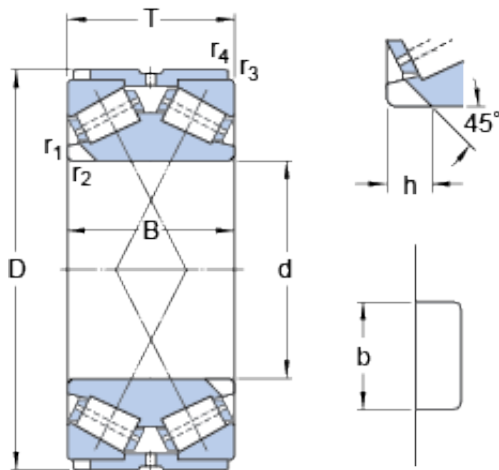

Bearing No. BT2B 334030/HA1

h	35 mm
d	460 mm
D	680 mm
T	180 mm
B	180 mm
b	51.3 mm
Size (mm)	680x460x180
Width (mm)	180
Mass bearing	250 kg
Bearing number	BT2B 334030/HA1
Thrust factor K	0.6
Thrust factor - K	0.6
Bore Diameter (mm)	680
Outer Diameter (mm)	460
Calculation factor e	0.99
$r_{3,4}$ min.	6 mm
$r_{1,2}$ min.	2.5 mm
d_1 ?	500 mm
D_1 ?	582 mm
$r_{3,4}$ - min.	6 mm
Design variant/feature	TDIS.2/N1
$r_{1,2}$ - min.	2.5 mm
Calculation factor - e	0.99
Basic dynamic load rating C	3140 kN
Basic dynamic load rating - C	3140 kN
Calculation factor Y_0	0.67
Calculation factor Y_2	1.02
Calculation factor Y_1	0.69
Fatigue load limit P_u	530 kN

Calculation factor - Y_0	0.67
Calculation factor - Y_2	1.02
Fatigue load limit - P_u	530 kN
Calculation factor - Y_1	0.69
Basic static load rating C_0	6950 kN
Basic static load rating - C_0	6950 kN
Comparative radial load rating C_F	780 kN
Comparative axial load rating C_{Fa}	750 kN
Comparative radial load rating - C_F	780 kN
Comparative axial load rating - C_{Fa}	750 kN