


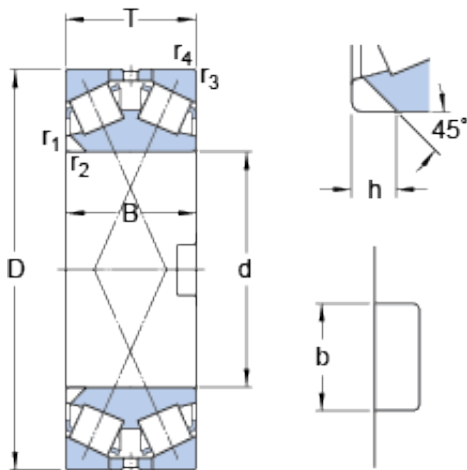

Bearing No. BT2B 332167 C/HA3

h	41.275 mm
d	400 mm
D	650 mm
T	240 mm
B	240 mm
b	64.2 mm
Size (mm)	650x400x240
Width (mm)	240
Mass bearing	305 kg
Bearing number	BT2B 332167 C/HA3
Thrust factor K	0.67
Thrust factor - K	0.67
Bore Diameter (mm)	650
Outer Diameter (mm)	400
Calculation factor e	0.88
$r_{3,4}$ min.	6.4 mm
$r_{1,2}$ min.	6.4 mm
d_1 ?	456 mm
D_1 ?	531 mm
$r_{3,4}$ - min.	6.4 mm
Design variant/feature	TDIS/N2
$r_{1,2}$ - min.	6.4 mm
Calculation factor - e	0.88
Basic dynamic load rating C	3910 kN
Basic dynamic load rating - C	3910 kN
Calculation factor Y_0	0.8
Calculation factor Y_2	1.15
Calculation factor Y_1	0.77
Fatigue load limit P_u	620 kN

Calculation factor - Y_0	0.8
Calculation factor - Y_2	1.15
Fatigue load limit - P_u	620 kN
Calculation factor - Y_1	0.77
Basic static load rating C_0	8150 kN
Basic static load rating - C_0	8150 kN
Comparative radial load rating C_F	980 kN
Comparative axial load rating C_{Fa}	836 kN
Comparative radial load rating - C_F	980 kN
Comparative axial load rating - C_{Fa}	836 kN