




Bearing No. NCF29/500V

E	630 mm
d	500 mm
D	670 mm
B	100 mm
C	100 mm
S	7 mm
D1	611 mm
d1	553 mm
Weight	100 Kg
Db max	652 mm
ra max.	4 mm
Da max.	652 mm
da min.	518 mm
r1 min.	5 mm
r4 min.	5 mm
r3 min.	5 mm
r2 min.	5 mm
rb max.	4 mm
das rec.	544 mm
Size (mm)	500x670x100
Width (mm)	100
Bearing number	NCF29/500V
Limiting speed	450 r/min
Reference speed	380 r/min
Bore Diameter (mm)	500
Outer Diameter (mm)	670
Fatigue load limit (Pu)	415
Basic dynamic load rating (C)	2330 kN
Basic static load rating (C0)	5000 kN

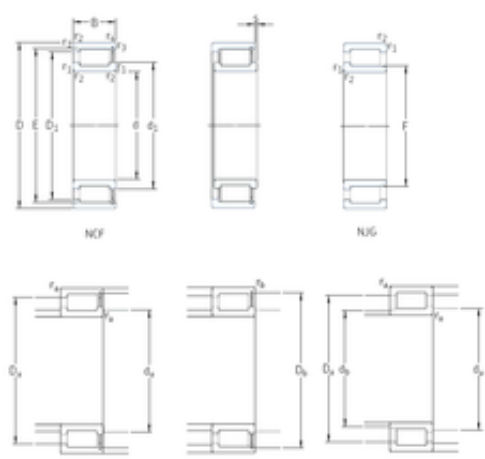