


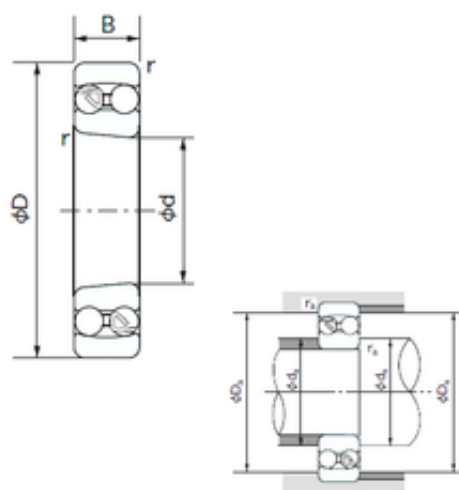

Bearing No. 1213K

D	120 mm
d	65 mm
B	23 mm
C	23 mm
Noun	Bearing
Bore	2.559 Inch 65 Millimeter
Weight	1.15 Kg
UNSPSC	31171532
Da max.	111 mm
r1 min.	1.5 mm
da min.	74 mm
ra max.	1.5 mm
Category	Self Aligning Ball Bearings
Inventory	0.0
Size (mm)	65x120x23
Enclosure	Open
Width (mm)	23
Weight / LBS	2.53531
Product Group	B00152
Inch - Metric	Metric
Cage Material	Steel
Other Features	Allowable Misalignment 2.5 Deg 1:12 Taper
Adapter Sleeve	H-213X
Bearing number	1213K
Keyword String	Self Aligning
Precision Class	ABEC 1 ISO P0
Mounting Method	Tapered Adapter
Rolling Element	Ball Bearing

Long Description	65MM Bore; Tapered Adapter Mount; 120MM Outside Diameter; 23MM Inner Race Width; 23MM Outer Race Width; Open; Steel Cage; Double Row of Balls; ABEC 1 ISO P0; C0-Medium
Outer Race Width	0.906 Inch 23 Millimeter
Outside Diameter	4.724 Inch 120 Millimeter
Manufacturer URL	http://www.nachi.com
Inner Race Width	0.906 Inch 23 Millimeter
Weight / Kilogram	0
Manufacturer Name	NACHI
Internal Clearance	C0-Medium
Bore Diameter (mm)	65
Outer Diameter (mm)	120
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Calculation factor (e)	0.17
Number of Rows of Balls	Double Row
Calculation factor (Y1)	3.7
Calculation factor (Y0)	3.8
(Oil) Lubrication Speed	5900 r/min
(Grease) Lubrication Speed	4800 r/min
Basic static load rating (C0)	12,5 kN
Basic dynamic load rating (C)	31 kN