


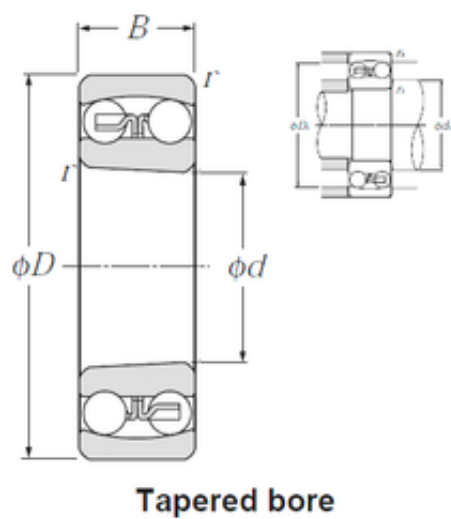

Bearing No. 1213SK

e	0.17
d	65 mm
D	120 mm
B	23 mm
C	23 mm
Y0	3.8
Y2	5.7
Y1	3.7
Mass	1.15 kg
ra max	1.5 mm
Da max	112 mm
Ce min	5 mm
db min	70 mm
da max	83 mm
da min	73 mm
rs min	1.5 mm
Weight	1,15 Kg
r min.	1,5 mm
Da max.	112 mm
da min.	73 mm
ra max.	1,5 mm
Size (mm)	65x120x23
Width (mm)	23
Nlim (oil)	6,000 rpm
Nlim (grease)	4,800 rpm
Bearing number	1213SK
Precision class	P0
Dynamic load, C	31 kN
Static load, C0	12.5 kN
Bore Diameter (mm)	65

Outer Diameter (mm)	120
Radial clearance class	CN
Calculation factor (e)	0,17
(Oil) Lubrication Speed	6 000 r/min
Calculation factor (Y1)	3,7
Calculation factor (Y0)	3,8
(Grease) Lubrication Speed	4 800 r/min
Associated sleeve reference	H213X
Basic dynamic load rating (C)	31 kN
Basic static load rating (C0)	12,5 kN
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C