




Bearing No. 1214-K-TVH-C3 + H214

	H214 / Adapter sleeve
d	70 mm
m	1,23 kg / Weight
e	0,19
D	125 mm
B	24 mm
l	41 mm
c	14 mm
Size (mm)	60x125x24
Width (mm)	24
m ₁	0,63 kg / Weight, adapter sleeve
Y ₁	3,36
d ₁	87,7 mm
Y ₂	5,21
D _m	92 mm
C _r	35000 N / Dynamic load rating (radial)
D ₁	106,6 mm
Y ₀	3,52
n _G	6000 1/min / Limiting speed
n _B	7900 1/min / Reference speed
C _{0r}	13700 N / Static load rating (radial)
Bearing number	1214-K-TVH-C3 + H214
C _{ur}	850 N / Fatigue limit load, radial
d _{1H}	60 mm
r _{a max}	1,5 mm

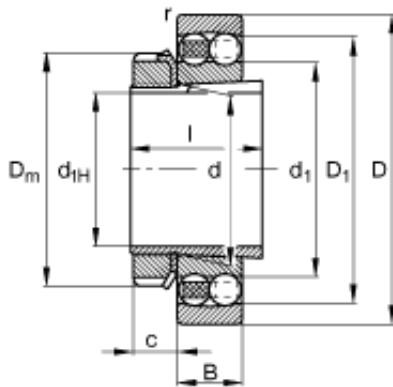

$d_{b \text{ min}}$	75 mm
$D_{a \text{ max}}$	116 mm
$B_{a \text{ min}}$	5 mm
$d_{a \text{ max}}$	79 mm
Bore Diameter (mm)	60
Outer Diameter (mm)	125