


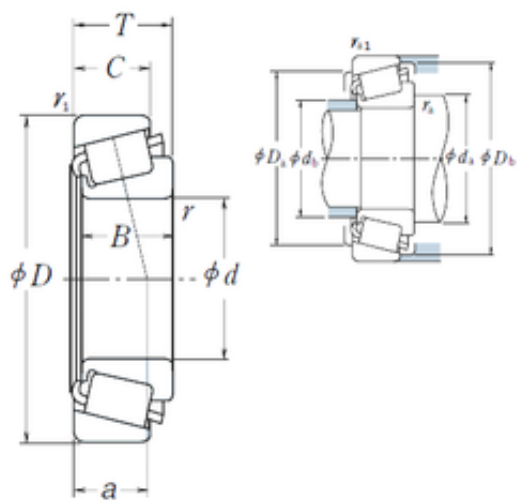

Bearing No. A6075/A6157

e	0.53
d	19.05 mm
D	39,992 mm
T	12,014 mm
B	11,153 mm
C	9,525 mm
a	10,3 mm
Da	34 mm
B_	11.153
Db	37 mm
da	24 mm
Y0	0.63
db	23 mm
C0	15.7
D_	39.992
Z_	17
C_	9.525
Y1	1.1
DE_	32.352
SLR	7
D_a	34
DI_	24.096
DA1	4.551
DA2	3.945
CUP	0.031
DA_	4.25
D_b	37
RAr	52.176
SDM_	28.219
KBRG	3161

yobi	A6075/A6157
CONE	0.037
ALP21	38
ALP22	42
ALP23	0
BETA_	2
BET21	5
BET23	0
BET22	0
r min.	1 mm
LangID	1
Weight	0,068 Kg
ALPHA_	19.35
r1 min.	1,3 mm
ra max.	1 mm
Oil rpm	13000
outer r	1.3
hidYobi	A6075/A6157
GRS rpm	9500
inner r	1
hidTable	ecat_NSTPRI
inner ra	1
outer rb	1.3
ra1 max.	1,3 mm
Size (mm)	19.05x39.992x12.014
SHOG_yobi	A6075R/A6157R
Prod_Type3	TRBSR_ID_A
Width (mm)	12,014
Bearing number	A6075/A6157
Bore Diameter (mm)	19.05
Outer Diameter (mm)	39,992
Calculation factor (e)	0,53

(Oil) Lubrication Speed	13000 r/min
Calculation factor (Y0)	0,63
(Grease) Lubrication Speed	9500 r/min
Basic static load rating (C0)	15,7 kN
Basic dynamic load rating (C)	14,9 kN