


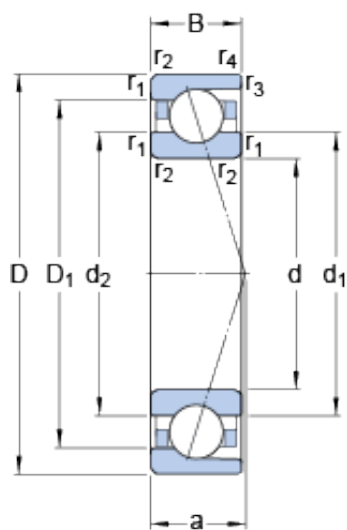

Bearing No. 71900 ACD/P4A

a	6.8 mm
d	10 mm
D	22 mm
B	6 mm
UNSPSC	31171531
Category	Bearings
Ball - z	12
Inventory	0.0
Size (mm)	22x10x6
Width (mm)	6
Mass bearing	0.009 kg
Product Group	B04270
d _n	14.8 mm
D ₁	18 mm
d _n	14.8 mm
D ₁	18 mm
d ₂	14 mm
d ₁	14 mm
d ₁	14 mm
d ₂	14 mm
Bearing number	71900 ACD/P4A
Preload class D	65 N/micron
Preload class C	49 N/micron
Preload class B	38 N/micron
Preload class A	29 N/micron
G _{ref}	0.12 cm3
Manufacturer Name	SKF
Number of balls z	12
Weight / Kilogram	0.011

D_a max.	20 mm
d_b min.	12 mm
d_a min.	12 mm
D_b max.	20.6 mm
r_a max.	0.3 mm
r_b max.	0.2 mm
Bore Diameter (mm)	22
Outer Diameter (mm)	10
Minimum Buy Quantity	N/A
$r_{3,4}$ min.	0.2 mm
D_b - max.	20.6 mm
D_a - max.	20 mm
d_b - min.	12 mm
$r_{1,2}$ min.	0.3 mm
d_a - min.	12 mm
r_b - max.	0.2 mm
Ball - D_w	3.175 mm
Calculation factor f	1.03
Calculation factor e	0.68
r_a - max.	0.3 mm
$r_{3,4}$ - min.	0.2 mm
$r_{1,2}$ - min.	0.3 mm
Calculation factor - f	1.03
Calculation factor - e	0.68
Ball diameter D_w	3.175 mm
Basic dynamic load rating C	2.42 kN
Basic dynamic load rating - C	2.4 kN
Preload class B G_B	30 N
Preload class A G_A	15 N
Preload class D G_D	120 N
Preload class C G_C	60 N

Preload class A - G_A	15 N
Preload class C - G_C	60 N
Preload class D - G_D	120 N
Preload class B - G_B	30 N
Fatigue load limit P_u	0.045 kN
Calculation factor f_1	0.98
Calculation factor f_{2C}	1.08
Calculation factor f_{HC}	1
Calculation factor f_{2D}	1.14
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.04
Calculation factor - f_1	0.98
Calculation factor - Y_2	1.41
Calculation factor - Y_0	0.76
Limiting speed for oil lubrication	95000 mm/min
Calculation factor - Y_1	0.92
Fatigue load limit - P_u	0.045 kN
Calculation factor - X_2	0.67
Calculation factor - f_{HC}	1
Calculation factor - f_{2A}	1
Calculation factor - f_{2C}	1.08
Calculation factor - f_{2D}	1.14
Calculation factor - f_{2B}	1.04
Limiting speed for grease lubrication	63000 r/min
Basic static load rating C_0	1.06 kN
Static axial stiffness, preload class A	29 N/ μ m
Static axial stiffness,	38 N/ μ m

preload class B	
Attainable speed for grease lubrication	63000 r/min
Static axial stiffness, preload class D	65 N/μm
Static axial stiffness, preload class C	49 N/μm
Basic static load rating - C_0	1.1 kN
Attainable speed for oil-air lubrication	95000 r/min
Reference grease quantity G_{ref}	0.12 cm ³
Calculation factor (single, tandem) Y_2	0.87
Calculation factor (single, tandem) Y_0	0.38
Calculation factor (single, tandem) X_2	0.41
Calculation factor (back-to-back, face-to-face) Y_1	0.92
Calculation factor (back-to-back, face-to-face) Y_2	1.41
Calculation factor (back-to-back, face-to-face) Y_0	0.76
Calculation factor (back-to-back, face-to-face) X_2	0.67