


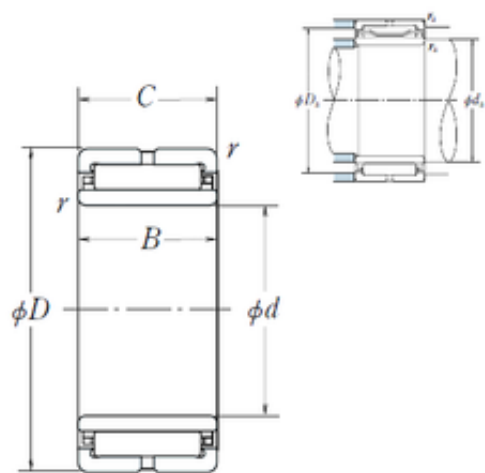

Bearing No. NA6902

|         |          |
|---------|----------|
| r       | 0.3      |
| d       | 15 mm    |
| D       | 28 mm    |
| B       | 23 mm    |
| C       | 23 mm    |
| B1      | 23       |
| D_      | 28       |
| Sl      | 20       |
| Z_      | 17       |
| C0      | 28.6     |
| d2      | 15       |
| ra      | 0.3      |
| B_      | 23       |
| Fw      | 20 mm    |
| C1_     | 23       |
| DA_     | 2.5      |
| SLR     | 17.8     |
| DE_     | 25       |
| KBRG    | 8353     |
| SDM_    | 22.5     |
| yobi    | NA6902   |
| mass2   | 0.064    |
| Weight  | 0,064 Kg |
| LangID  | 1        |
| da_max  | 26       |
| da_min  | 17       |
| r min.  | 0,3 mm   |
| OIL rpm | 22000    |
| ra max. | 0,3 mm   |
| da min. | 17 mm    |
|         |          |

|                               |             |
|-------------------------------|-------------|
| GRS rpm                       | 13000       |
| Da max.                       | 26 mm       |
| hidYobi                       | NA6902      |
| hidTable                      | ecat_NSMRNR |
| Size (mm)                     | 15x28x23    |
| Prod_Type3                    | NRB_S_NA    |
| Width (mm)                    | 23          |
| Bearing number                | NA6902      |
| Bore Diameter (mm)            | 15          |
| Outer Diameter (mm)           | 28          |
| (Grease) Lubrication Speed    | 13000 r/min |
| Basic static load rating (C0) | 28,6 kN     |
| Basic dynamic load rating (C) | 19,3 kN     |