


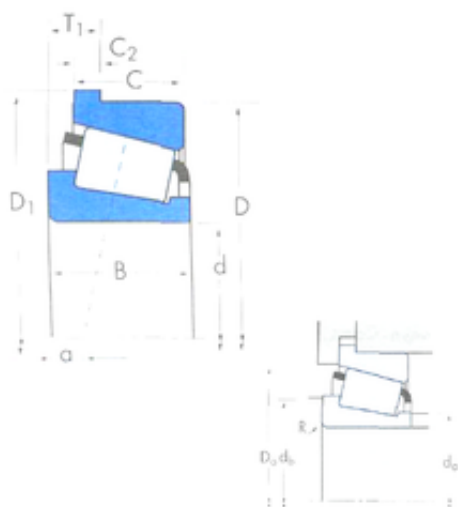

Bearing No. 95500/95925B

|                                  |                 |
|----------------------------------|-----------------|
| C                                | 49,212 mm       |
| R                                | 6,3 mm          |
| d                                | 127 mm          |
| D                                | 234,95 mm       |
| B                                | 63,5 mm         |
| da                               | 142 mm          |
| C2                               | 11,112 mm       |
| db                               | 154 mm          |
| D1                               | 245,958 mm      |
| Da                               | 209 mm          |
| T1                               | 25,4 mm         |
| a -                              | 14 mm           |
| Weight                           | 12,28 Kg        |
| Size (mm)                        | 127x234.95x63.5 |
| Width (mm)                       | 63,5            |
| Factor (K)                       | 1,58            |
| Factor (G1)                      | 453,9           |
| Factor (G2)                      | 59,4            |
| Bearing number                   | 95500/95925B    |
| Bore Diameter (mm)               | 127             |
| Outer Diameter (mm)              | 234,95          |
| Calculation factor (e)           | 0,37            |
| Basic static load rating (C0)    | 931 kN          |
| Basic dynamic load rating (C1)   | 582 kN          |
| Basic dynamic load rating (C90)  | 151             |
| Basic dynamic load rating (Ca90) | 95,5            |