


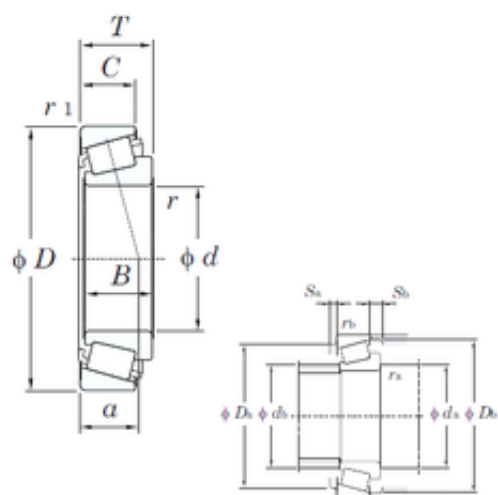

Bearing No. 33205JR

D	52 mm
d	25 mm
T	22 mm
B	22 mm
C	18 mm
a	14,1 mm
e	0.35
Cr	61.1
Y0	0.94
Y1	1.71
Cu	8.25
C0r	58.5
Bore	0.984 Inch 25 Millimeter
Noun	Bearing
a(mm)	14.1
Da min	43 mm
da max	30 mm
Weight	0,225 Kg
r min.	1 mm
r(min)	1
UNSPSC	31171516
Db(min)	49
db(max)	30
Da(max)	46.5
Da(min)	43
r1(min)	1
Sa(min)	4
Sb(min)	4
ra(max)	1

rb(max)	1
da(min)	30.5
ra max.	1 mm
Db min.	49 mm
Da max.	46,5 mm
da min.	30,5 mm
r2 min.	1 mm
rb max.	1 mm
Oil lub.	10000
Category	Tapered Roller Bearings Assembly
Size (mm)	25x52x22
Component	Assembly
Inventory	0.0
Width (mm)	22
Grease lub.	7900
Bearing No.	33205JR
Basic Number	33205
Weight / LBS	0.496
Inch - Metric	Metric
Product Group	B04334
Other Features	High Load Capacity
Keyword String	Tapered
Assembly Width	0.866 Inch 22 Millimeter
Bearing number	33205JR
Precision Class	Standard
(Refer.)Mass(kg)	0.225
Outside Diameter	2.047 Inch 52 Millimeter
Manufacturer URL	http://www.koyousa.com
Long Description	Assembly; Standard Precision; 25MM Bore; 52MM Outside

	Diameter; 22MM Assembly Width; Single Row of Rollers
Weight / Kilogram	0.23
Manufacturer Name	KOYO
Bore Diameter (mm)	25
Outer Diameter (mm)	52
Minimum Buy Quantity	N/A
Calculation factor (e)	0,35
Number of Tapered Rows	Single Row
Harmonized Tariff Code	8482.20.00.00
Flange Outside Diameter	0 Inch 0 Millimeter
(Oil) Lubrication Speed	10000 r/min
Calculation factor (Y0)	0,94
Manufacturer Item Number	33205JR
(Grease) Lubrication Speed	7900 r/min
Basic static load rating (C0)	58,5 kN
Basic dynamic load rating (C)	48,9 kN