


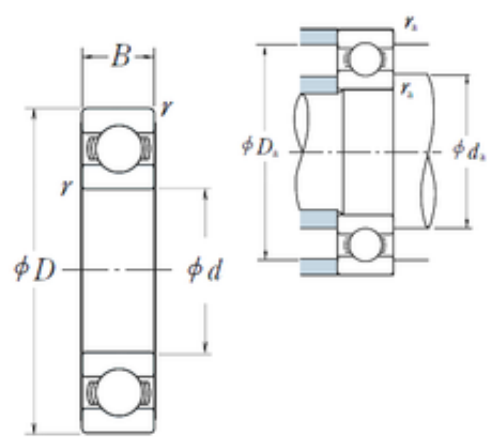

Bearing No. 16015

D	115 mm
d	75 mm
B	13 mm
C	13 mm
r	0.6
Z_	17
B_	13
D_	115
ra	0.6
C0	25.3
fo	16.4
DI_	85.475
SRE	4.93
SRI	4.93
D_a	111
DA_	9.525
DE_	104.525
mass	0.463
SREN	-0.02
SBRG	0
KBRG	6101
SREX	0.02
Bore	2.953 Inch 75 Millimeter
SRIX	0.02
Noun	Bearing
SRIN	-0.02
yobi	16015
SDM_	95
bomp	0

C_conv	27600
da min	79
LangID	1
r min.	0,6 mm
ALPHA_	0
UNSPSC	31171504
Weight	0,463 Kg
ra max.	0,6 mm
Da max.	111 mm
GRS rpm	5600
da min.	79 mm
Oil rpm	6700
hidYobi	16015
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Enclosure	Open
Inventory	5.0
Snap Ring	No
Size (mm)	75x115x13
Prod_Type3	DGBB_SR_OT
Width (mm)	13
Weight / LBS	1.021
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Bearing number	16015
Keyword String	Ball
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Outside Diameter	4.528 Inch 115 Millimeter
Outer Race Width	0.512 Inch 13 Millimeter

Long Description	75MM Bore; 115MM Outside Diameter; 13MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Manufacturer Name	NSK
Weight / Kilogram	0.455
Internal Clearance	C0-Medium
Bore Diameter (mm)	75
Outer Diameter (mm)	115
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	6 700 r/min
Internal Special Features	No
(Grease) Lubrication Speed	5 600 r/min
Basic static load rating (C0)	25,3 kN
Basic dynamic load rating (C)	27,6 kN
Maximum Capacity / Filling Slot	No